

**OPTIMIZING STRATEGIC AND OPERATIONAL DECISIONS OF
CAR SHARING SYSTEMS UNDER DEMAND SUBSTITUTION
AND UNCERTAINTY**

by
SİNAN EMRE KOŞUNDA

Submitted to the Graduate School of Engineering and Natural Sciences
in partial fulfilment of
the requirements for the degree of Master of Science

Sabancı University
June 2023



SİNAN EMRE KOŞUNDA 2023 ©

All Rights Reserved

ABSTRACT

OPTIMIZING STRATEGIC AND OPERATIONAL DECISIONS OF CAR SHARING SYSTEMS UNDER DEMAND SUBSTITUTION AND UNCERTAINTY

SİNAN EMRE KOŞUNDA

INDUSTRIAL ENGINEERING M.S. THESIS, JUNE 2023

Thesis Supervisor: Asst. Prof. Esra Koca Paç
Thesis Co-Supervisor: Asst. Prof. Beste Başçiftci

Keywords: Car Sharing, substitution, electric vehicles, sustainable operations, stochastic mixed-integer programming, decomposition algorithms

Optimizing car sharing systems under demand uncertainty is an emerging problem that aims to ensure profitable and sustainable operations with quality of service concerns when a mix fleet of vehicles including internal combustion and electrical engines is considered. To address this problem, we propose a two-stage stochastic mixed-integer program leveraging spatial-temporal networks that capture the strategic and operational decisions of these systems over a multi-period planning horizon. We optimize the location decisions of regions to serve with purchasing decisions of the vehicles while considering parking capacities, satisfying one-way and round-trip car rental requests, and relocating cars between open regions under each demand realization. We introduce demand substitution to this problem by extending the multi-commodity formulation, and further prove that the corresponding second-stage problem has a totally unimodular constraint matrix. As our solution approach, we provide a branch-and-cut based decomposition algorithm with enhancements. Our case study demonstrates the benefits of incorporating strategic and operational decisions along with the demand substitution, and provides insights for region opening and fleet allocation plans under demand uncertainty. We further present an extensive computational study highlighting the performance of the proposed solution algorithm with significant speedups.

ÖZET

TALEP BELİRSİZLİĞİ VE İKAME ALTINDA ARAÇ PAYLAŞIM SİSTEMLERİNDE GÖZLEMLENEN STRATEJİK VE OPERASYONEL KARARLARIN OPTİMİZASYONU

SİNAN EMRE KOŞUNDA

ENDÜSTRİ MÜHENDİSLİĞİ YÜKSEK LİSANS TEZİ, HAZİRAN 2023

Tez Danışmanı: Dr. Öğr. Üyesi Esra Koca Paç
Tez Eş Danışmanı: Dr. Öğr. Üyesi Beste Başçiftci

Anahtar Kelimeler: Araç Paylaşımı, İkame, Elektrikli Araçlar, Sürdürülebilir Operasyonlar, Stokastik Karma Tam Sayılı Programlama, Ayrıştırma Algoritması

Talep belirsizliği altında araç paylaşım sistemlerinin optimizasyonu problemi, belirli bir hizmet kalitesinde karlı ve sürdürülebilir operasyonlar yürütmek amacıyla ortaya çıkmıştır. Benzinli ve elektrikli gibi farklı tipte araçlardan oluşabilen karma filolar ile çoklu dönemler boyunca istenilen servis kalitesinde operasyonları yürütebilmek için stratejik ve operasyonel problemlerin dikkatli bir şekilde çözülmesi gerekmektedir. Bu tezde, böyle bir problemin çözümü için sistemin mekân-zamansal ağ temsilinden faydalanılarak iki-aşamalı bir stokastik karma tam sayılı program önerilmiştir. Servis sağlayacak bölgelerin park alanı kapasiteleri, tek yönlü ve gidiş-dönüş araç kiralama talep senaryoları ve servis bölgeleri arasında araçların yerlerinin düzeltilmesi operasyonları düşünülerek servis bölgelerinin lokasyonları ve kullanılacak araçların satın alma kararları optimize edilmiştir. Sonrasında, sisteme belirli bir araç için olan talebin başka bir araç ile sağlanması (talep ikamesi) opsiyonu eklenmiş ve çoklu emtia formülasyonu genişletilerek bu durum da matematiksel modele eklenmiştir. Ayrıca, bu durumda dahi ikinci aşama modelinin tamamen unimodüler kısıt matrisine sahip olduğu ispatlanmıştır. Problemlerin çözümü için ayrıştırma temelli dalve-kesi algoritmaları geliştirilmiş ve algoritmalar farklı stratejilerle iyileştirilmiştir. Vaka analizi çalışmalarında, stratejik ve operasyonel kararları talep ikamesi opsiyonu ile birlikte değerlendirmenin faydaları vurgulanmış ve servis bölgesi açma ve filo yerleşim planı kararları için içgörüler elde edilmiştir. Ayrıca, önerilen çözüm algoritmalarının performansını vurgulayan kapsamlı bir hesaplama çalışması sunulmuştur.

ACKNOWLEDGEMENTS

I would like to express my sincere gratitude to my advisors, Asst. Prof. Beste Bařıftci and Asst. Prof. Esra Koca Paç, for their invaluable guidance and support throughout my master's program. Their expertise and encouragement helped me to write this thesis.

I would also like to thank Asst. Prof. Duygu Tař Kten, Prof. Tonguç nlyurt and Prof. Z. Caner Tařkm for serving on my thesis committee and providing helpful advice and feedback.

I would like to thank my uncle and mentor, Asst. Prof. Vedat Bayram for his endless support.

I would like to thank my friend and colleague, Çaęrı Doęuř İyican for his friendship and support.

I would like to thank my parents Naci and Emine, and my sister Sinem for their constant love and support.



*To my family
Aileme*

TABLE OF CONTENTS

LIST OF TABLES	ix
LIST OF FIGURES	x
1. INTRODUCTION	1
2. LITERATURE REVIEW	5
3. PROBLEM FORMULATIONS	10
3.1. Problem Statement and Spatial-Temporal Network	10
3.2. Service Region and Operational Planning Problem (SROP)	14
3.3. Service Region and Operational Planning Problem with Substitution (SROP-S)	17
4. SOLUTION ALGORITHM	22
4.1. Benders Decomposition for SROP	22
4.2. Benders Decomposition for SROP-S	24
4.3. Computational Enhancements	26
5. COMPUTATIONAL STUDY	28
5.1. Experimental Setup	28
5.2. Model Insights	30
5.3. Computational Performances	37
6. CONCLUSION	39
BIBLIOGRAPHY	40
APPENDIX A	43

LIST OF TABLES

Table 2.1. Classification of the Related Literature	9
Table 3.1. Capacities and Unit Flow Revenues of Arc Types	13
Table 3.2. Objective Function Coefficients of the Multicommodity Arc Flows in the Operational Problem for the Example (r'_{al})	19
Table 5.1. Capacities and Fixed Costs for Each Service Region	29
Table 5.2. Revenue and Cost Values of SROP and SROP-S Under Differ- ent Budget Levels	31
Table 5.3. Value of Substitution and Average Flows for $B = \$3M$	33
Table 5.4. Demand Satisfaction Rates for SROP and SROP-S Under Dif- ferent Budget Parameters	35
Table 5.5. The Effect of Carbon Emission Allowance on Planning Decisions	37
Table 5.6. Computational Comparison of Model Types for Different Pa- rameters and Problem Sizes	38
Table A.1. Value of Substitution and Average Flows for $B = \$3.5M$	43

LIST OF FIGURES

Figure 3.1. A Spatial-Temporal Network Example	13
Figure 5.1. Visual Comparison of Demand Satisfaction Rates of SROP (left) and SROP-S (right) for $B = 3M$	35
Figure 5.2. Visual Comparison of Demand Satisfaction Rates of SROP (left) and SROP-S (right) for $B = 3.5M$	36
Figure A.1. Visual Comparison of Demand Satisfaction for $H=0.3$ and $B=3M$	44
Figure A.2. Visual Comparison of Demand Satisfaction for $H=0.3$ and $B=3.5M$	44

1. INTRODUCTION

Car sharing has been an emerging area of smart city operations by utilizing vehicles in a more efficient manner while reducing congestion and providing environmental benefits with the help of its sharing ecosystem (U.S. Department of Transportation, 2016). In car sharing services, customers rent cars for a certain amount of time, where they pick up and drop off the vehicles at regions that are served by these service provider companies. Enabling pick up and drop off locations to be different from each other provides flexibility to the customers by allowing one-way trips in addition to the round-trips, in which these locations are the same. Nevertheless, this necessitates more complex operational planning, as the car sharing companies need to ensure rebalancing of vehicles between different service regions throughout their daily operational plans. Another complexity arises when the customer demand is not fully known in advance. Furthermore, different customer segments can prefer different vehicle types, leading to consideration of various vehicle types simultaneously in fleet management and allocation. Consequently, the car sharing companies need to determine their service regions while taking into account a mix fleet of vehicles and their operational planning under demand uncertainty.

Transportation sector constitutes the largest source of emissions of carbon dioxide in the United States (U.S. Congressional Budget Office, 2022). Thus, increasing usage of electric vehicles (EVs) within the mobility systems are projected to significantly alleviate the impact of emissions over the next decade. Despite of their fuel-efficiency and environmental benefits, the major concerns against the mass adoption of EVs are the higher purchasing costs compared to internal combustion vehicles (ICVs), range anxiety and limited charging infrastructure. Therefore, instead of the ownership of EVs, car sharing companies can provide rental services to the customers through these vehicles. This approach can further eliminate the concerns of the customers by removing the higher cost of purchasing and providing charging infrastructure within the parking stations operated by the car sharing companies (Brandstätter, Leitner & Ljubić, 2020). As car sharing services are mainly operating in urban areas, range anxiety can be mitigated with easier access to the charging infrastructure.

Nevertheless, with the improvements in the battery technologies, most of the recently sold EVs in the United States in 2022 have longer range with more than 240 miles (U.S. Vehicle Technologies Office, 2023). Such a driving range is significantly larger than the distance travelled in majority of the car sharing trips, considering the car sharing operations of various companies in the United States (He, Mak, Rong & Shen, 2017) and Germany (Ströhle, Flath & Gärttner, 2019). These factors can eliminate the need of recharging of EVs throughout the day, which can make them more attractive to the customers and easier to operate for the car sharing companies.

Although EVs are becoming an important component of the car sharing services, their operations need to be jointly considered with the ICVs as these companies can have existing fleets with ICVs and adoption of EVs by customers can require a transitional period (Abouee-Mehrizi, Baron, Berman & Chen, 2021). For instance, the largest car sharing companies, such as Zipcar and Share Now, operate a mix fleet with electric and internal combustion vehicles. Thus, the joint consideration of both vehicle types constitute a critical concern during this transition. Moreover, since the purchasing cost of EVs is higher than ICVs, environmental consciousness of the companies need to be explicitly captured while constructing the mixed fleet of electric and internal combustion vehicles. Therefore, to increase the percentage of the EVs in the fleet, we consider carbon emission constraints that should be taken into account, which guarantee that the average carbon emission of the fleet is limited by a given unit carbon emission allowance. In their study, Chang, Yu, Shen & Xu (2017) investigate the effects of limiting the overall carbon emission rates on the car usages and refer the trade-off between the carbon emission reduction and the car sharing company's revenue. Although a similar approach, which is adopted from the most commonly used carbon emission calculation protocol (Greenhouse Gas Protocol, 2023), is considered in production planning problems (Absi, Dauzère-Pérès, Kedad-Sidhoum, Penz & Rapine, 2013,1), it has not been utilized in the literature in optimizing the car sharing systems over a fleet of a company. To this end, we consider restricting the average CO_2 emission of the purchased cars.

As car sharing companies need to consider a mix fleet of vehicles, the demand for each vehicle type need to be incorporated into the planning of service region design, operations and repositioning activities. To this end, leveraging substitution between different vehicle types in satisfying customer demand provides flexibility in operations with higher quality of service and results in higher revenues. In addition to the vehicles with different fuel technologies, mix fleets can be classified in terms of the vehicle segments based on a vehicle's total cargo and interior passenger volumes, and substitution between different vehicle types can become further favorable in satisfying the customer demand corresponding to each segment. Although the

value of substitution has been demonstrated across various operations management problems in efficiently matching supply and demand, its value and integration to car sharing operations have not been investigated. To address these problems, we study the strategic and operational decision making of the car sharing companies with a mix fleet of vehicles by capturing the uncertainty in customer demand and integration of substitution between different vehicle types. The goal of the companies is to maximize their net profits over this multi-period planning problem, while taking into account the revenue obtained from round-trip and one-way rentals and the cost of serving regions and rebalancing vehicles between them for satisfying customer demand. Consequently, our contributions can be summarized as follows:

- We propose a service region design and operational planning problem for a car sharing company with a mix fleet of vehicles by using spatial-temporal networks to model the round-trip and one-way rentals along with the repositioning trips. To integrate uncertainty in customer demand, we formulate this problem as a two-stage stochastic mixed-integer program that maximizes the net profit of the company, where the first-stage problem determines which regions to serve and how to allocate the fleet of each vehicle type to each region under a budget limitation and carbon emission considerations. Given these decisions, the second-stage problem optimizes the operational plans under each demand realization.
- We introduce substitution to this problem by allowing customer demand of each vehicle type to be satisfied by its potential alternatives, with a penalty incurred by the car sharing company from its regular prices for incentivizing such trips. To formulate this problem, we propose a two-stage stochastic mixed-integer program that extends our spatial-temporal network representation to capture the substitute trips for round-trip and one-way rentals for each vehicle type, and show that it generalizes our initial formulation.
- We develop an exact decomposition based algorithm to solve the resulting challenging problems, where we leverage the structure of the proposed formulations. We further provide computational enhancements to improve the efficiency of the algorithm. Our computational study illustrates significant speed-ups obtained by our solution algorithm with enhancements in comparison to the off-the-shelf solvers.
- We present an extensive case study based on real data sets. Our findings demonstrate that introducing substitution to the car sharing operations significantly impacts service region design, fleet management decisions, demand satisfaction and operational plans. We provide various managerial insights

that can be summarized as follows:

- When substitution is allowed between different vehicle types, customer demand can be satisfied more, leading to higher quality of service and higher profits. Depending on the demand distribution across different service regions, this can further impact which regions to serve.
- When the budget of the company for constructing its fleet is smaller, the impact of substitution becomes larger, leading to higher percentage improvements in net profit in comparison to the plans without substitution.
- With substitution, car sharing companies need to perform less relocation trips between different service regions over time, since one-way trips can be utilized more to satisfy the necessary rebalancing operations.
- Depending on the penalty amount of substitution incurred by the car sharing company, amount of rental trips that are satisfied by alternative vehicle types changes, where the smaller penalty values leads to higher substitution rates.
- Carbon emission limitations considered affect the fleet allocation to each vehicle type, such as electric and internal combustion vehicles, impacting the value of substitution remarkably.

The remainder of the thesis is organized as follows. In Chapter 2, we provide the relevant literature. In Chapter 3, we first present the problem statement with the spatial-temporal network, and then formulate the service region and operational planning problems by introducing substitution. In Chapter 4, we present our solution algorithm, and in Chapter 5, we provide our detailed case study with various insights, showcasing the importance of the presented models and the computational efficiency of the solution algorithm. Chapter 6 concludes the thesis with final remarks.

2. LITERATURE REVIEW

The demand for car sharing services is increasing rapidly due to the recent economical and environmental circumstances, and the constant growth of transportation requirements in daily lives, which brings new problems for car sharing companies. Excessive competition and increasing costs also make companies to deal with the strategic and operational decisions more seriously. Thus, the literature on various aspects of car sharing systems is growing fast (Ferrero, Perboli, Rosano & Vesco, 2018; Nansubuga & Kowalkowski, 2021).

The problems observed in car sharing systems are studied from different perspectives under different assumptions and modeling approaches. Earlier studies on car sharing systems consider a deterministic setting where all problem parameters are known beforehand (e.g. Boyacı, Zografos & Geroliminis, 2015; Chang et al., 2017; de Almeida Correia & Antunes, 2012; Gambella, Malaguti, Masini & Vigo, 2018; Nair & Miller-Hooks, 2014) while recent studies are mostly focused on stochastic settings where some problem parameters, i.e. the demand, are not known with certainty (e.g. Çalık & Fortz, 2019; He et al., 2017; Kaspi, Raviv & Tzur, 2014; Lu, Chen & Shen, 2018; Zhang, Lu & Shen, 2021). The latter studies also differ from each other based on the modeling scheme used for dealing with uncertainty. Markovian models (e.g. Kaspi et al., 2014), robust optimization (e.g. He et al., 2017) and two-stage stochastic programming (e.g. Lu et al., 2018) are the three main modeling approaches used in these studies. Besides, there are many studies using simulation to evaluate different strategical and/or operational strategies for car sharing systems (e.g. Barth & Todd, 1999; Jorge, Correia & Barnhart, 2014; Kaspi et al., 2014; Pfrommer, Warrington, Schildbach & Morari, 2014).

Since location decisions are expensive strategic decisions, they should be carefully made by the firms to optimize their performances and operations over a long term. We refer the interested reader to the book by Laporte, Nickel & Saldanha da Gama (2015) for a review of different location problems and their application areas. Locating the stations and fleet sizing and positioning are the two main decisions considered in the literature on car sharing systems. A variety of papers in the car sharing liter-

ature consider both of these decisions (e.g. Boyacı et al., 2015; Çalık & Fortz, 2019; de Almeida Correia & Antunes, 2012; He et al., 2017; Zhang et al., 2021), however a fewer of these studies consider the additional operational decisions including the accepted/rejected reservations, relocation, charging EVs, etc. On the other hand, there are studies that focus on the operational decisions and optimize only the vehicle flows between the stations to maximize the profit (e.g. Chang et al., 2017; Gambella et al., 2018; Kaspi et al., 2014; Lu et al., 2018; Pfrommer et al., 2014).

Other aspects that create a distinction between the studies in the car sharing literature are the types of the vehicles (identical or different) and the types of the trips allowed (one-way, round-trip or mixed) in the system. Although car sharing companies have several different car types in their fleets in practice, there are only a very few studies that consider a mix fleet of vehicles (Abouee-Mehrzi et al., 2021; Chang et al., 2017). To the best of our knowledge, Abouee-Mehrzi et al. (2021) is the only study that considers a mixed fleet with a focus on the interplay between electric and traditional vehicles. The authors model the problem as a queuing network and derive conditions under which it is optimal to use EVs in the system. As pointed out by Chang et al. (2017), one-way trips give a great flexibility to the customers for planning their trips, but managing the system with one-way trips is a harder and costly problem for the companies due to the supply-demand imbalance across the stations caused by one-way trips. Accordingly, studies considering one-way trips mostly focus on the relocation actions for mitigating this imbalance - see the review by Illgen & Höck (2019) for the studies on relocation problems arising in one-way car sharing systems. Ferrero et al. (2018) states that almost 50% of the papers (among 137 papers published between 2001 and 2016) in the car sharing literature focus on only one-way trips. However, in practice, the companies allowing one-way trips also offer round trips with slightly less charges. For instance, ZipCar offers a new service ZipCar Flex in UK where both one-way and round-trips are allowed. Hence, considering both trip types in the system makes the study more realistic.

Increasing customers awareness and the successful performance increases in EVs, encourage car sharing companies to include EVs in their fleets. Accordingly, the research on green car sharing problems has grown recently (Ferrero et al., 2018). When the fleet includes EVs, additional operations such as charging decisions for EVs and locating charging stations might be also considered in the problem (e.g. He, Ma, Qi & Wang, 2021; Zhang et al., 2021). Besides, the affects of car sharing systems on carbon emissions are analyzed from different perspectives such as considering customer behaviour on transportation mode and car type selection, total distance traveled, and availability of EVs (Amatuni, Ottelin, Steubing & Mogollón, 2020; Chang et al., 2017; Jung & Koo, 2018; Luna, Uriona-Maldonado, Silva & Vaz,

2020). However, to the best of our knowledge, the carbon emission constraints are considered in the design stage of a car sharing system only in Chang et al. (2017). The carbon emission constraints of Chang et al. (2017) consider the actual flow of vehicles and calculate the exact emission of the system. However, the common approach for determining the emission for a system, product, etc. is to determine the average carbon emission per unit used or produced (Absi et al., 2013; Greenhouse Gas Protocol, 2023), and we adapt this approach in our study.

Product substitution is widely used in manufacturing systems. In these systems, production plans are arranged with respect to the stochastic demand. When the demand is realized, some of the items may be stocked out. For these items, a company or manufacturer may want to avoid loss of sales and utility. Thus, the company can use downward substitution for this stocked out item. For this substitution system, a higher valued production is substituted downward for a stock out lower valued item to have higher customer satisfaction rates. However, it may not be profitable to substitute for every item combination. So, production plan is optimized accordingly. This system provides customers to have equally good alternatives. From customers perspective, their utility increases. However, companies may encounter some cost. There are different studies for product substitution. Dawande, Gavirneni, Mu, Sethi & Sriskandarajah (2010) developed a model to minimize the total cost which is summation of changeover, holding and substitution cost. For the manufacturer, demand for a lower valued product can be satisfied from inventory by considering holding cost, from changing the produced product by considering changeover cost, or from substitution by considering downward substitution cost. Rao, Swaminathan & Zhang (2004) works on a single period multi-product inventory problem, and one-way downward substitution is allowed. In the first stage, they decide whether a product is produced and amount of the product. After the demand is realized, substitution is made if necessary. Liu, Ma, Hu, Jin, Li, Chang & Yu (2019) develops the optimal production strategy for a multi period stochastic hybrid manufacturing/remanufacturing system. Downward substitution is allowed to lower risk of lost sales. Similar to this study, Shumsky & Zhang (2009) models a multi-period capacity allocation problem with multiple product types. After the allocation decisions and demand realization, if a product is stocked out, by one level downward substitution, demand can be satisfied. Different from downward substitution studies, Xu, Yao & Zheng (2011) considers an inventory system over a selling season with a single replenishment with two products that can be substituted for each other. A substitution may be offered by supplier with a discount price and this offer may be accepted by a customer. Feng, Li, Lu & Shanthikumar (2022) developed a formulation for a dynamic model that uses uncertain sources as product

inventories and allocation of these products with consideration of the flexibility of substitution to meet the uncertain demand. Different from some studies on network revenue management their study analyzes decisions of firm with respect to inventory allocation for substitution to meet the demand. The downward substitution in car sharing systems is studied in Smet (2021). They focus on vehicle substitution in car sharing systems with round-trip rentals. They developed two-stage stochastic model to maximize expected profit under uncertain demand. First stage variables include vehicle assignment of mixed fleet of cars to locations and second stage includes recourse actions of acceptance or rejection of requests. Substitution is allowed, but similar to the manufacturing processes, only downward substitution can be done. On the other hand, only round-trip rentals are considered, thus vehicle movements between different zones are ignored. This approach makes the problem easier with respect to systems with one-way rentals.

Our motivation is to consider an operational problem for a mixed fleet of vehicles under uncertain demand for both one-way and round-trip rentals with strategic region opening and fleet sizing decisions. To this end, we develop a mixed integer stochastic programming model. In the first stage of which region opening, fleet size of each car type with respect to the given budget and carbon emission rates, and the allocation of this fleet to service zones are decided. In the second stage we construct a spatial-temporal network for vehicle movements in each scenario to represent revenue of uncertain demand for one-way and round-trip rentals. Furthermore, we define substitution among each type of car to increase car sharing company's revenue by enhancing demand satisfaction levels and decreasing demand loss. To increase computational efficiency, we develop a cutting-plane based solution algorithm tailored for this problem. We study the effect of different parameter settings for carbon emission and penalty rates, budget values, and value of substitution for managerial insights. We summarize the related literature in Table 2.1 to indicate the contribution of our work.

Table 2.1 Classification of the Related Literature

Paper	Uncertain Parameters	SR Decision?	Fleet Sizing?	Mixed Fleet?	EVs?	Carbon Emission Constraints	Substitution?	Modeling Approach
de Almeida Correia & Antunes (2012)	–	Yes	Yes	No	No	No	No	MIP
Nair & Miller-Hooks (2014)	–	Yes	No	No	No	No	No	Bi-Level MIP
Boyacı et al. (2015)	–	Yes	Yes	No	Yes	No	No	MIP
Chang et al. (2017)	–	No	Yes	Yes	No	Yes	No	MIP
Gambella et al. (2018)	–	No	No	No	Yes	No	No	MIP
Boldrini, Bruno & Conti (2016)	demand	No	No	No	Yes	No	No	Simulation
He et al. (2017)	travel pattern and adoption behaviour of customers	Yes	No	No	Yes	No	No	DRO, MISOCP
Brandstätter, Kahr & Leitner (2017)	demand	Yes	Yes	No	Yes	No	No	TSSP
Lu et al. (2018)	demand	No	Yes	No	No	No	No	TSSP
Çahk & Fortz (2019)	demand	Yes	Yes	No	Yes	No	No	TSSP
Zhang et al. (2021)	demand, electricity prices	Yes	Yes	No	Yes	No	No	TSSP
He et al. (2021)	demand	Yes	Yes	No	Yes	No	No	Queuing, MISOCP
Smet (2021)	demand	Yes	No	Yes	No	No	Yes	TSSP
This study	demand	Yes	Yes	Yes	Yes	Yes	Yes	TSSP

DRO: Distributionally Robust Optimization

TSSP: Two-Stage Stochastic Programming

3. PROBLEM FORMULATIONS

In this chapter, we formally introduce the service region and operational planning problem for optimizing strategic and operational decisions of car sharing systems with a mix fleet of cars under demand uncertainty and car type substitution. We first present the problem statement with the spatio-temporal network that is used for capturing the operational level decisions in Chapter 3.1. Then, we propose the service region and operational planning problem under demand uncertainty in Chapter 3.2. Finally, we generalize this problem and introduce car type substitution in Chapter 3.3 by allowing demand of each car type to be satisfied by its alternatives.

3.1 Problem Statement and Spatial-Temporal Network

We consider a car sharing company that plans its service regions and fleet sizes for its mix fleet of cars while taking into account operational decisions under demand uncertainty. Customer demand can be identified through reservation of one-way trips and round-trips, where the one-way trips allow customers to pick up and drop off their cars at different service regions and the round-trips require customers to drop off their cars to their pick up location. The operational decisions are based on the car movements to satisfy one-way and round-trip customer demand and relocate cars when it is necessary. In particular, relocation trips are conducted by the car sharing company to rebalance the cars from one service region to another depending on the fleet allocation and customer demand.

The goal of the car sharing company is to maximize its annual profit by considering the revenue obtained from the one-way and round-trips along with the cost of relocating cars and operating service regions. Company has a budget limitation in constructing its fleet, which consists of a mixture of car types to satisfy needs of different customer groups. To this end, the cars can be classified in terms of the

customer market segments they will be preferred by or in terms of its fueling technology such as internal combustion and electric vehicles. For this study, we focus on an environmentally-aware company that aims to design its fleet while taking into account its carbon emissions. Thus, purchase of internal combustion cars needs to be adjusted with the purchase of electric cars to satisfy the emission targets for the fleet.

We formulate this problem through two-stage stochastic mixed-integer programs, where the first-stage problems determine the strategic decisions including which regions to serve and how to construct the fleet and allocate to these regions. Given these decisions, the second-stage problems optimize the operational plans corresponding to the car movements resulting from one-way, round-trip and relocation trips under each demand realization. We approach this problem through two different formulations where the initial formulation does not allow substitution of demand through different car types and the latter formulation introduces substitution to increase profitability and customer satisfaction. Both formulations share the same set of strategic level decisions, resulting in the same first-stage problem. However, the second-stage problems of these formulations differ as allowing substitution complicates the problem significantly, requiring development of alternative formulations. To capture the operational decisions, both formulations benefit from spatial-temporal networks, which consider car movements on different service regions over a multi-period planning horizon.

In the first-stage problem, the car sharing company determines which regions to serve from the set of possible service regions, denoted by I . The binary variable z_i indicates whether region $i \in I$ is opened or not. To construct its fleet and allocate them to the open regions, the company considers car types from the set K . The integer variable x_{ik} indicates the number of type $k \in K$ cars allocated to region $i \in I$ at the beginning of the planning. To open and operate a service region $i \in I$, the company needs to pay a fixed cost of f_i . Furthermore, company has a budget of B for purchasing the cars, where each car type $k \in K$ has a cost of c_k and emission amount of e_k . To adjust the carbon emissions of the fleet, a threshold value H is considered to ensure that the average carbon emissions of the purchased vehicles is less than this value. Since car sharing companies that utilize EVs can have charging stations at the parking locations of these vehicles, we consider parking stations dedicated to EVs to have charging facilities (Brandstätter et al., 2020; Chang et al., 2017). This further allows the company to start their operational daily planning with fully charged EVs which can remove the need for additional recharging throughout that day considering the longer driving ranges.

We consider the operational level problem over T time periods under demand uncertainty. These time periods correspond to the subperiods of a representative day for capturing the daily operations. To incorporate the operational level problem to the strategic level problem, the net profit obtained by this problem is scaled by multiplying it with D , where D represents the number of operational days considered in the annual planning. The uncertainty is represented through demand scenarios, which are captured by set W , that are sampled from a given distribution. Each scenario $w \in W$ has a probability of occurrence π_w . We represent the customer demand through one-way trips and round-trips between service regions and time periods. In particular, for trips starting at period $t \in \{0, 1, \dots, T-1\}$ and ending at period $s \in \{1, \dots, T\}$, the parameter d_{ijktsw} represents the demand for one-way trips from region $i \in I$ to region $j \in I \setminus \{i\}$ of car type $k \in K$ in scenario $w \in W$, and the parameter d_{iktsw} represents the demand for round-trips for region $i \in I$ of car type $k \in K$ in scenario $w \in W$.

To characterize the movement of the cars in the operational level problem, we construct a spatial-temporal network $G = (N, A)$ with a node set N and an arc set A . Each node corresponds to a service region and time pair, which is denoted in the form of n_{it} representing region $i \in I$ at period $t \in \{0, 1, \dots, T\}$, where $t = 0$ represents the status at the beginning of the operational planning. The directed arcs in this network indicate the movement of cars over time and space from one region to another from one time period to another. This network uses arcs of four different types as follows:

- One-way arcs in the form (n_{it}, n_{js}) correspond to the car flows of one-way trips from region i to region j from period t to period s . The capacity of this arc in scenario w for each car type k depends on the demand amount d_{ijktsw} .
- Round-trip arcs in the form (n_{it}, n_{is}) correspond to the car flows of round-trips for region i from period t to period s . The capacity of this arc in scenario w for each car type k depends on the demand amount d_{iktsw} .
- Relocation arcs in the form $(n_{it}, n_{j,t+\zeta_{ij}})$ correspond to the car flows organized by the car sharing company to ensure rebalancing from region i to region j from period t to $t + \zeta_{ij}$. Here, ζ_{ij} denotes the time that is needed to travel from region i to j . These arcs are assumed to have sufficiently large capacity to ensure relocation operations.
- Idle arcs in the form $(n_{it}, n_{i,t+1})$ for $t = 1, \dots, T-1$, correspond to the cars that are not used at region i at the end of period t after considering the flows on the relevant one-way arcs, round-trip arcs and relocation arcs. The capacities

of these arcs for each car type k is the corresponding parking capacity of the region i , which is C_i^k .

Table 3.1 Capacities and Unit Flow Revenues of Arc Types

Arc Type	Capacity (u_{akw})	Revenue (r_{ak})
Idle Arc $a = (n_{it}, n_{i,t+1})$	C_i^k	0
One-Way Arc $a = (n_{it}, n_{js})$	d_{ijktsw}	$r_k^{one}(s-t)$
Round-Trip Arc $a = (n_{it}, n_{is})$	d_{iktsw}	$r_k^{two}(s-t)$
Relocation Arc $a = (n_{it}, n_{j,t+\zeta_{ij}})$	∞	$-r^{rel}\zeta_{ij}$

We denote the sets of one-way, round-trip, relocation and idle arcs by A^{one} , A^{two} , A^{rel} , A^{idle} , respectively, where A represents the union of these four arc sets. Furthermore, to represent the arcs whose origin node is n_{it} , we define the set $\sigma^+(n_{it})$, and for the arcs whose destination node is n_{it} , we define the set $\sigma^-(n_{it})$. Table 3.1 provides a summary of each arc type belonging to the spatial-temporal network with their arc capacities and unit flow revenues. For representing the arc capacities of each arc a for car type k in scenario w , we define the parameter u_{akw} . For representing the unit revenue of each arc a for car type k , we define the parameter r_{ak} . In terms of the costs, one-way and round-trip arcs return profit by satisfying customer demand, whereas relocation arcs incur cost due to the resources used by the car sharing company to ensure rebalancing between different regions and time periods. Since car sharing companies generally adopt a time-based payment system that prices the trips based on their durations, the profit of one-way and round-trip arcs are computed based on the rental duration. Here, r_k^{one} and r_k^{two} represent the revenue of a car type k per time unit for one-way trips and round-trips, respectively. Similarly, the cost of relocation arcs depend on the duration of the arc multiplied by the unit time cost of relocating cars, denoted by r^{rel} . For the idle arcs, company does not incur any additional cost, as the parking costs are included in the fixed cost of operating the service regions.

Figure 3.1 A Spatial-Temporal Network Example

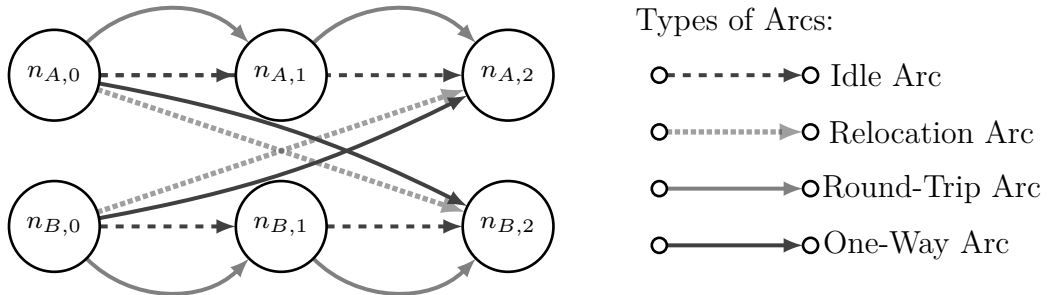


Figure 3.1 provides a visual representation of the spatial-temporal network with two

regions A and B over three time periods $\{0, 1, 2\}$ with sample one-way and round-trips. We note that each car type $k \in K$ corresponds to a different commodity that flows through our spatial-temporal network with its own set of one-way, round-trip, relocation and idle arcs. When substitution is integrated into this spatial-temporal network, then the demand of a customer for a specific car type can be satisfied by an another type of car, which implies that one-way and round-trip arcs can be shared across different commodities in the network. To address this issue, we define additional commodities as we introduce the operational problem with substitution in Chapter 3.3 by extending the flows in the arcs from the commodity of each car type to its multiple commodity types to explicitly capture the potential substitutions between different types of cars for satisfying the customer demand.

3.2 Service Region and Operational Planning Problem (SROP)

To address the operational planning problem of the car sharing company, we define the integer decision variable y_{akw} , which represents the number of cars of type $k \in K$ in scenario $w \in W$ that are flowing on arc $a \in A$ over the spatial-temporal network. Combining above, we formulate the service region and operational planning (SROP) problem as follows:

$$(3.1a) \quad \max \quad - \sum_{i \in I} f_i z_i + D \sum_{w \in W} \sum_{a \in A} \sum_{k \in K} \pi_w r_{ak} y_{akw}$$

$$(3.1b) \quad \text{s.t.} \quad x_{ik} \leq C_i^k z_i \quad \forall i \in I, \forall k \in K,$$

$$(3.1c) \quad \sum_{i \in I} \sum_{k \in K} c_k x_{ik} \leq B,$$

$$(3.1d) \quad \sum_{i \in I} \sum_{k \in K} e_k x_{ik} \leq H \sum_{i \in I} \sum_{k \in K} x_{ik},$$

$$(3.1e) \quad \sum_{a \in \sigma^+(n_{it})} y_{akw} - \sum_{a \in \sigma^-(n_{it})} y_{akw} = \begin{cases} x_{ik} & \text{if } t = 0 \\ 0 & \text{if } t \in \{1, \dots, T-1\} \\ -x_{ik} & \text{if } t = T \end{cases}$$

$$\forall i \in I, \forall k \in K, \forall w \in W$$

$$(3.1f) \quad y_{akw} \leq u_{akw} z_i \quad \forall a = (n_{it}, n_{is}) \in A^{two}, \forall k \in K, \forall w \in W,$$

$$(3.1g) \quad y_{akw} \leq u_{akw} z_i \quad \forall a = (n_{it}, n_{js}) \in A^{one}, \forall k \in K, \forall w \in W,$$

$$(3.1h) \quad y_{akw} \leq u_{akw} z_j \quad \forall a = (n_{it}, n_{js}) \in A^{one}, \forall k \in K, \forall w \in W,$$

$$(3.1i) \quad y_{akw} \leq C_i^k z_i \quad \forall a = (n_{it}, n_{i,t+1}) \in A^{idle}, \forall k \in K, \forall w \in W,$$

$$\begin{aligned}
(3.1j) \quad & z_i \in \{0, 1\} \quad \forall i \in I, \\
(3.1k) \quad & x_{ik} \in \mathbb{Z}^+ \quad \forall i \in I, \forall k \in K, \\
(3.1l) \quad & y_{akw} \in \mathbb{Z}^+ \quad \forall a \in A, \forall k \in K, \forall w \in W.
\end{aligned}$$

The objective function (3.1a) maximizes the total profit by considering the cost of operating service regions, expected revenue obtained from satisfying customer demand and expected cost of rebalancing cars between opened service regions. Constraint (3.1b) ensures that the number of cars allocated to each open service region for each car type does not exceed their associated parking capacities. Constraint (3.1c) corresponds to the total purchasing budget of the company in constructing its mix fleet of cars. Constraint (3.1d) limits the total adjusted amount of CO_2 emissions by restricting the average emission amount over the purchased vehicles. In other words, the average carbon emission of the fleet which is given by $\frac{\sum_{i \in I} \sum_{k \in K} e_k x_{ik}}{\sum_{i \in I} \sum_{k \in K} x_{ik}}$ should not exceed the unit carbon allowance H for each car the company owns.

Constraints (3.1e) are the flow balance constraints over the spatial-temporal network under every scenario $w \in W$. More specifically, at the beginning of the planning for the operational problem with T time periods, each open service region $i \in I$ has x_{ik} cars for each car type $k \in K$. During the intermediate time periods $t \in \{1, \dots, T-1\}$, the number of cars leaving each node of the network is equal to the number of cars entering that node for every car type $k \in K$. At the last operational time period T , each open service region $i \in I$ has x_{ik} cars for each car type $k \in K$, returning to their initial allocation. This consideration is done to have the same initial number of cars at each region for operating the car share system every T periods. Moreover, as EVs are considered, allowing these vehicles to be fully charged at their parking spots at the end of T time periods is necessary.

Constraint (3.1f) guarantees that the flow on the arcs corresponding to the round-trips should not exceed the capacity of their arcs over the open service regions. Similarly, constraints (3.1g) and (3.1h) are for the flows corresponding to the one-way trips by limiting the flow amounts on the relevant arcs when both origin and destination regions are opened. Constraint (3.1i) considers the parking capacity of each open service region through the idle arcs for each car type. The remainder constraints ensure the integrality of the service region opening, fleet allocation and operational car flow decisions.

Next in order, we reformulate the SROP problem (3.1) as a two-stage stochastic program in (3.2), where the first-stage represents the strategic level planning problem and determines the service region opening \mathbf{z} and fleet allocation decisions \mathbf{x} . Given these decisions, we define the second-stage problem for every scenario $w \in W$

3.3 Service Region and Operational Planning Problem with

Substitution (SROP-S)

A challenge for the SROP problem is that the demand for one-way trips and round-trips are lost if there are no available cars in the type requested by the customers. Nevertheless, in practice, car sharing companies can substitute between different car types by providing alternative options to the customers in case the specific car type requested by the customer is not available. This leads to flexibility in operations, higher customer satisfaction and better quality of service, which are desirable. To address this issue within planning, we introduce substitution to the SROP problem by allowing demand of one car type to be satisfied by another car type.

To model this problem over the spatial-temporal network, we introduce additional commodities in the form of a flow of a specific car type that is used for satisfying demand of the same or an alternative type of car. We define the set of commodities as L , where each commodity $l \in L$ can be represented as the flow of car type $k^1 \in K$ that is used for satisfying the demand of car type $k^2 \in K$. To this end, if k^1 is equal to k^2 , then the demand of that car type is satisfied by itself, which is the case with no substitution. However, if k^1 is different than k^2 , then substitution occurs by satisfying the demand of car type k^2 with a different type k^1 . Subsequently, we propose two different commodity sets for each car type $k \in K$. First, let F^k represent the set of commodities that use car type $k \in K$. Secondly, let \hat{F}^k represent the set of commodities that can be used to satisfy the demand for car type $k \in K$. We note that for every car type $k \in K$, the set $F^k \cap \hat{F}^k$ returns a single commodity which represents the case without substitution where the demand of car type k is satisfied by itself. Hence, the commodities in the sets $\cup_{k \in K} (F^k \cap \hat{F}^k)$ and $L \setminus \cup_{k \in K} (F^k \cap \hat{F}^k)$ represent the no substitution and substitution cases, respectively. Additionally, the commodity set L can be written as $L = \cup_{k \in K} F^k = \cup_{k \in K} \hat{F}^k$. To limit the substitution amount and potential customer dissatisfaction, we define a penalty parameter for substituted rentals as p_l per time unit for every $l \in L \setminus \cup_{k \in K} (F^k \cap \hat{F}^k)$, which is discounted from rental price of the car. Thus, for each car type $k \in K$, we revise the revenue parameter defined in Table 3.1 by introducing r'_{al} for every $a \in A^{one} \cup A^{two}$ and $l \in L$, where $r'_{al} = r_{ak}$ for $l \in F^k \cap \hat{F}^k$, and $r'_{al} = r_{ak} - p_l$ for $l \in \hat{F}^k \setminus (F^k \cap \hat{F}^k)$. Since substitution is utilized for satisfying demand, the idle and relocation arcs are only defined over the commodities $l \in \cup_{k \in K} (F^k \cap \hat{F}^k)$, corresponding to the set of commodities representing the flows with no substitution, which further represents the commodities considered in the SROP problem. Thus, for each car type $k \in K$, for every $a \in A^{idle} \cup A^{rel}$, $r'_{al} = r_{ak}$ for $l \in F^k \cap \hat{F}^k$.

For illustrating the commodities and integration of substitution to the operational planning problem, we provide the following example setting with two car types.

Example 1 (Multicommodity Flows with Substitution). *We consider a car sharing company that classifies its cars into two types based on its fueling technology. More specifically, let $k = E$ represent electric vehicles and let $k = G$ represent internal combustion vehicles. As we consider substitution, the demand of each vehicle type can be satisfied by the other vehicles. To this end, we define four commodities to represent these relationships:*

- *Commodity E-E: Electric cars used to satisfy the demand for electric cars*
- *Commodity E-G: Electric cars used to satisfy the demand for internal combustion cars*
- *Commodity G-G: Internal combustion cars used to satisfy the demand for internal combustion cars*
- *Commodity G-E: Internal combustion cars used to satisfy the demand for electric cars*

First, observe that commodities E-E and G-G correspond to the car flows with no substitution where the demand of each car type is satisfied by the same type of car. On the other hand, commodities E-G and G-E represent the substitution possibilities by allowing the demand of each car type to be satisfied by the other one. By using these four different commodities, we define $F^E = \{E-E, E-G\}$ for electric cars and $F^G = \{G-G, G-E\}$ for internal combustion cars, since commodities E-E and E-G use electric cars, whereas commodities G-G and G-E use internal combustion cars. On the other hand, we define $\hat{F}^E = \{E-E, G-E\}$ for electric cars and $\hat{F}^G = \{E-G, G-G\}$ for internal combustion cars, to construct the sets of commodities that are used for satisfying the demand of each car type.

Under this setting, the flows on the spatial-temporal network is in terms of these commodities, where one-way and round-trip arcs have car flows for each of the four commodities, and idle and relocation arcs include flows only for the commodities E-E and G-G. Table 3.2 provides the objective function coefficients of each of the arc flows over the commodities in the operational problem by using the values of the revenue parameter r'_{al} over every $a \in A$ and $l \in L$, whenever the corresponding commodity is defined on that arc.

Table 3.2 Objective Function Coefficients of the Multicommodity Arc Flows in the Operational Problem for the Example (r'_{al})

Arc types	Commodities Using Car Type E		Commodities Using Car Type G	
	E-E	E-G	G-G	G-E
Idle $a = (n_{it}, n_{i,t+1})$	0	-	0	-
One-way $a = (n_{it}, n_{js})$	$r_E^{one}(s-t)$	$(r_E^{one} - p_{E-G})(s-t)$	$r_G^{one}(s-t)$	$(r_G^{one} - p_{G-E})(s-t)$
Round-trip $a = (n_{it}, n_{is})$	$r_E^{two}(s-t)$	$(r_E^{two} - p_{E-G})(s-t)$	$r_G^{two}(s-t)$	$(r_G^{two} - p_{G-E})(s-t)$
Relocation $a = (n_{it}, n_{j,t+\zeta_{ij}})$	$-c_E^{rel}\zeta_{ij}$	-	$-c_G^{rel}\zeta_{ij}$	-

For constructing the operational problem with substitution, we introduce the integer variable y_{alw} , for $a \in A^{one} \cup A^{two}$, $l \in L$ and $a \in A^{idle} \cup A^{rel}$, $l \in \cup_{k \in K} F^k \cap \hat{F}^k$, which indicates the number of cars of commodity l in scenario $w \in W$ that are flowing on arc a over the spatial-temporal network. We formulate the resulting Service Region and Operational Planning with Substitution (SROP-S) problem as a two-stage stochastic program in (3.4). Similar to the SROP problem, the first-stage problem optimizes the service region opening \mathbf{z} and fleet allocation decisions \mathbf{x} . Given these decisions, we revise the second-stage problem for every scenario $w \in W$ by defining $\bar{\theta}_w(\mathbf{z}, \mathbf{x})$ that allows substitution between different car types.

$$(3.4a) \quad \max \quad - \sum_{i \in I} f_i z_i + D \sum_{w \in W} \pi_w \bar{\theta}_w(\mathbf{z}, \mathbf{x})$$

$$\text{s.t.} \quad (3.1b) - (3.1d),$$

$$(3.4b) \quad z_i \in \{0, 1\}, x_{ik} \in \mathbb{Z}^+ \quad \forall i \in I, \forall k \in K,$$

where for each scenario w ;

$$(3.5a) \quad \bar{\theta}_w(\mathbf{z}, \mathbf{x}) = \max \quad \sum_{a \in A^{one} \cup A^{two}} \sum_{l \in L} r'_{al} y_{alw} + \sum_{a \in A^{rel}} \sum_{k \in K} \sum_{l \in F^k \cap \hat{F}^k} r'_{al} y_{alw}$$

$$(3.5b) \quad \text{s.t.} \quad \sum_{l \in F^k} \sum_{a \in \sigma^+(n_{it})} y_{alw} - \sum_{l \in F^k} \sum_{a \in \sigma^-(n_{it})} y_{alw} = \begin{cases} x_{ik} & \text{if } t = 0 \\ 0 & \text{if } t \in \{1, \dots, T-1\} \\ -x_{ik} & \text{if } t = T \end{cases}$$

$$\forall i \in I, \forall k \in K,$$

$$(3.5c) \quad \sum_{l \in \hat{F}^k} y_{alw} \leq u_{akw} z_i \quad \forall a = (n_{it}, n_{is}) \in A^{two}, \forall k \in K,$$

$$(3.5d) \quad \sum_{l \in \hat{F}^k} y_{alw} \leq u_{akw} z_i \quad \forall a = (n_{it}, n_{js}) \in A^{one}, \forall k \in K,$$

$$(3.5e) \quad \sum_{l \in \hat{F}^k} y_{alw} \leq u_{akw} z_j \quad \forall a = (n_{it}, n_{js}) \in A^{one}, \forall k \in K,$$

$$(3.5f) \quad y_{alw} \leq C_i^k z_i \quad \forall a = (n_{it}, n_{i,t+1}) \in A^{idle}, \forall l \in F^k \cap \hat{F}^k, \forall k \in K,$$

$$(3.5g) \quad y_{alw} \in \mathbb{Z}^+ \quad \forall a \in A^{one} \cup A^{two}, l \in L,$$

$$(3.5h) \quad y_{alw} \in \mathbb{Z}^+ \quad \forall a \in A^{idle} \cup A^{rel}, l \in F^k \cap \hat{F}^k, \forall k \in K.$$

Under each demand realization of scenario $w \in W$, objective function of the second-stage problem (3.5a) maximizes the revenue obtained from one-way and round-trips minus the relocation cost and penalty of substitution. Constraints (3.5b) correspond to the flow balance constraints. Different than the second-stage problem of the SROP problem, for each car type $k \in K$, the flows over the multicommodities are summed over F^k , the set of commodities using car type k , to ensure the flow balance. Constraints (3.5c) - (3.5e) are analogous to constraints (3.3c) - (3.3e) in representing round-trips and one-way trips, whereas the flows for each car type $k \in K$ are summed over \hat{F}^k to consider the set of car flows satisfying the demand of car type k . Lastly, constraint (3.5f) ensures that for each car type $k \in K$, the idle cars at the end of each period are within the parking limit of the corresponding region and flow through its regular commodity as defined through $F^k \cap \hat{F}^k$.

Proposition 2. *Constraint matrix of the subproblem (3.5) under any scenario $w \in W$ is totally unimodular.*

Proof. Proof: Consider the constraint matrix of (3.5b) -(3.5f) for a given scenario $w \in W$. Observe that the balance constraints (3.5b) define a node-arc incidence matrix. The remaining constraints (3.5c)-(3.5f) partition the arc set into three groups: (3.5c) is written only for round-trip arcs, (3.5d) and (3.5e) are for one-way arcs and (3.5f) is for idle arcs. Since (3.5f) defines a unit row for each idle arc, we can ignore them. Moreover, both F_k and \hat{F}_k partition the commodity set L into k subsets. In other words, a variable y_{alw} is seen only in one of the constraints (3.5c) if $a \in A^{two}$. Similarly, y_{alw} is seen in one of the constraints (3.5d) and in one of the (3.5e) if a is $a \in A^{one}$.

Let G_1, G_2, G_3, G_4 be the set of rows due to constraints (3.5b), (3.5c), (3.5d), and (3.5e), respectively. We will prove that for any subset R of rows of the constraint matrix, there exists a partition R_1, R_2 of R such that the difference between these subsets is $\{0, 1, -1\}$ in any column. For any R , we construct our rule for partition as follows:

- All rows in $R \cap G_1$ will be included in R_1 .
- Each row in $R \cap G_2$ corresponds to an arc $a = (n_{it}, n_{is}) \in A^{two}$ and car type $k \in K$:

- If $R \cap G_1$ includes the rows for i, t, k and i, s, k , then we can include the row for a, k to any of R_1 and R_2 .
- If $R \cap G_1$ includes the row for i, t, k but not for i, s, k , then we add the row for a, k to R_1 .
- If $R \cap G_1$ includes the row for i, s, k but not for i, t, k , then we add the row for a, k to R_2 .
- Each row in $R \cap G_3$ and $R \cap G_4$ corresponds to an arc $a = (n_{it}, n_{js}) \in A^{one}$ and car type $k \in K$.
 - If $R \cap (G_3 \cup G_4)$ includes two rows for a, k , then we can include one of the rows to R_1 and the other one to R_2 .
 - If $R \cap (G_3 \cup G_4)$ includes only one row for a, k , then
 - * if $R \cap G_1$ includes both of the rows for i, t, k and j, s, k , then we can include the row for a, k to any of R_1 and R_2 .
 - * if $R \cap G_1$ includes the row for i, t, k but not for j, s, k , then we add the row for a, k to R_1 .
 - * if $R \cap G_1$ includes the row for j, s, k but not for i, t, k , then we add the row for a, k to R_2 .

Note that the partition of rows in $R \cap G_2$ and $R \cap (G_3 \cup G_4)$ are independent from each other since they include different columns, i.e. G_2 includes the variables defined for two-way arcs while $G_3 \cup G_4$ includes the variables for one-way arcs. Hence, due to the construction of R_1 and R_2 , the difference between the summation of rows in R_1 and R_2 will be in $\{0, -1, 1\}$ for any column (variable), and the result follows. \square

We benefit from the totally unimodularity of the constraint matrix of this second-stage problem as we design our exact solution algorithm to solve the challenging SROP-S problem.

Remark 1. *We note that the SROP-S problem is a generalization of the SROP problem. More specifically, when $F^k = \hat{F}^k$ for every car type $k \in K$, then each of these sets only include one commodity flow corresponding to the case when the demand of car type k is satisfied by the car type k itself. This reduces the SROP-S problem to the SROP problem as substitution is disregarded. Thus, by adjusting the car types allowed for substitution, the car sharing company can determine its flexibility level through leveraging the SROP-S problem.*

4. SOLUTION ALGORITHM

The two-stage stochastic programming models presented in the previous chapter are large-scale mixed integer programs (MIP) due to the potentially large number of scenario-dependent decision variables and constraints. The most popular procedure for solving this type of large-scale stochastic optimization models is to use the L-Shaped method (Van Slyke & Wets, 1969) which is actually the application of Benders decomposition (Benders, 1962) for solving two-stage stochastic linear programs. The main advantage of Benders decomposition for solving two-stage stochastic programs is that the second-stage problem decomposes for each scenario when the first-stage variables are fixed. By benefiting from our results in Propositions 1 and 2, we make use of this decomposing structure of our stochastic MIPs to develop an efficient branch-and-cut algorithm with computational enhancements.

In the subsequent sections, we present our Benders decomposition algorithm for SROP and SROP-S, which is an iterative process by solving a relaxed master problem (RMP) and generating cuts to be added for this problem accordingly. For both SROP and SROP-S, we keep the first stage decision variables \mathbf{z} and \mathbf{x} in the Benders RMP, but as their second-stage problems are different, the subproblems solved and the cuts generated are different as explained below.

4.1 Benders Decomposition for SROP

In our decomposition algorithm for SROP, in addition to the first stage decision variables \mathbf{z} and \mathbf{x} that will be considered in RMP we define auxiliary decision variables Q_w to approximate the optimal value of the subproblem for scenario $w \in W$.

Accordingly, at an intermediate step of the algorithm, we solve the following RMP:

$$\begin{aligned}
(4.1a) \quad & \max \quad - \sum_{i \in I} f_i z_i + D \sum_{w \in W} \pi_w Q_w \\
& \text{s.t.} \quad (3.1b) - (3.1d), (3.1j), (3.1k) \\
(4.1b) \quad & O(\mathbf{z}, \mathbf{x}, \mathbf{Q}) \geq 0, \\
(4.1c) \quad & Q_w \leq U_w \quad \forall w \in W,
\end{aligned}$$

where $O(\mathbf{z}, \mathbf{x}, \mathbf{Q}) \geq 0$ represents the optimality cuts generated and added to RMP until that iteration, and U_w represents an upper bound for the net profit that can be obtained under scenario $w \in W$. Since keeping the cars idle in their service regions in all periods through the idle arcs is a feasible solution for the subproblem (3.3) under any \mathbf{z} and \mathbf{x} solution, Benders feasibility cuts are not needed in our algorithm. U_w can be easily determined as the total profit of satisfying all demand under scenario $w \in W$ by ignoring the decisions of the problem.

Given an optimal solution $(\hat{\mathbf{z}}, \hat{\mathbf{x}}, \hat{\mathbf{Q}})$ for RMP, we solve the dual of the second-stage problem (3.3) as our subproblem for each scenario $w \in W$ in (4.2). To this end, dual variables $(\beta, \alpha, \gamma^1, \gamma^2, \lambda)$ are associated with the constraints (3.3b), (3.3c), (3.3d), (3.3e), (3.3f), respectively.

$$\begin{aligned}
(4.2a) \quad & \min \quad \sum_{i \in I} \sum_{k \in K} \hat{x}_{ik} (\beta_{i0kw} - \beta_{iTkw}) + \sum_{i \in I} \sum_{a \in A^{two}(i)} \sum_{k \in K} u_{akw} \hat{z}_i \alpha_{akw} \\
& + \sum_{i \in I} \sum_{a \in A^{one}(i^+)} \sum_{k \in K} u_{akw} \hat{z}_i \gamma_{akw}^1 + \sum_{i \in I} \sum_{a \in A^{one}(i^-)} \sum_{k \in K} u_{akw} \hat{z}_i \gamma_{akw}^2 \\
& + \sum_{i \in I} \sum_{k \in K} C_i^k \hat{z}_i \left(\sum_{a \in A^{idle}(i)} \lambda_{akw} \right) \\
(4.2b) \quad & \text{s.t.} \quad \beta_{itkw} - \beta_{jskw} + \gamma_{akw}^1 + \gamma_{akw}^2 \geq r_{ak} \quad a = (n_{it}, n_{js}) \in A^{one}, k \in K, \\
(4.2c) \quad & \beta_{itkw} - \beta_{iskw} + \alpha_{akw} \geq r_{ak} \quad \forall a = (n_{it}, n_{is}) \in A^{two}, k \in K, \\
(4.2d) \quad & \beta_{itkw} - \beta_{j,t+\zeta_{ij},kw} \geq r_{ak} \quad \forall a = (n_{it}, n_{j,t+\zeta_{ij}}) \in A^{rel}, k \in K, \\
(4.2e) \quad & \beta_{itkw} - \beta_{i,t+1,kw} + \lambda_{akw} \geq 0 \quad \forall a = (n_{it}, n_{i,t+1}) \in A^{idle}, k \in K, \\
(4.2f) \quad & \gamma_{akw}^1, \gamma_{akw}^2 \geq 0 \quad \forall a \in A^{one}, k \in K, \\
(4.2g) \quad & \alpha_{akw} \geq 0 \quad \forall a \in A^{two}, k \in K, \\
(4.2h) \quad & \lambda_{akw} \geq 0 \quad \forall a \in A^{idle}, k \in K,
\end{aligned}$$

where $A^{two}(i)$, $A^{one}(i^+)$, $A^{one}(i^-)$, $A^{idle}(i)$ represent the subsets of arcs that are defined for region $i \in I$. More specifically, $A^{two}(i) = \{a = (n_{it}, n_{is}) \in A^{two} : t, s \in \{0, \dots, T\}, t < s\}$ represents the set of all round-trip arcs incident to nodes defined

for region $i \in I$, $A^{one}(i^+) = \{a = (n_{it}, n_{js}) \in A^{one} : t, s \in \{0, \dots, T\}, t < s, j \in I\}$ and $A^{one}(i^-) = \{a = (n_{jt}, n_{is}) \in A^{one} : t, s \in \{0, \dots, T\}, t < s, j \in I\}$ represent the set of all one-way arcs with the origin and destination, respectively, of region $i \in I$, and $A^{idle}(i) = \{a = (n_{it}, n_{i,t+1}) \in A^{idle} : t \in \{0, \dots, T-1\}\}$ gives the set of all idle arcs defined for region $i \in I$.

At each iteration of the algorithm, we first solve the RMP and get its optimal solution $(\hat{\mathbf{z}}, \hat{\mathbf{x}}, \hat{\mathbf{Q}})$. Given this solution, we solve the subproblem (4.2) and obtain its optimal solution as $(\hat{\beta}, \hat{\alpha}, \hat{\gamma}^1, \hat{\gamma}^2, \hat{\lambda})$ for every scenario $w \in W$. If its objective function value is overestimated in the current optimal solution of RMP, i.e. if the optimal value of the subproblem for w is smaller than \hat{Q}_w , then we add the following optimality cut to RMP for scenario $w \in W$:

$$(4.3) \quad \begin{aligned} & \sum_{i \in I} \sum_{k \in K} x_{ik} (\hat{\beta}_{i0kw} - \hat{\beta}_{iTkw}) + \sum_{i \in I} \sum_{a \in A^{two}(i)} \sum_{k \in K} u_{akw} z_i \hat{\alpha}_{akw} + \sum_{i \in I} \sum_{a \in A^{one}(i^+)} \sum_{k \in K} u_{akw} z_i \hat{\gamma}_{akw}^1 \\ & + \sum_{i \in I} \sum_{a \in A^{one}(i^-)} \sum_{k \in K} u_{akw} z_i \hat{\gamma}_{akw}^2 + \sum_{i \in I} \sum_{k \in K} C_i^k z_i \left(\sum_{a \in A^{idle}(i)} \hat{\lambda}_{akw} \right) - Q_w \geq 0 \end{aligned}$$

4.2 Benders Decomposition for SROP-S

Similar to the previous section, to solve SROP-S with Benders decomposition we first introduce auxiliary decision variables \bar{Q}_w to approximate the optimal value of the subproblem for scenario $w \in W$. Hence, the following RMP will be solved at an intermediate iteration of the algorithm for SROP-S:

$$(4.4a) \quad \max \quad - \sum_{i \in I} f_i z_i + D \sum_{w \in W} \pi_w \bar{Q}_w$$

$$\text{s.t.} \quad (3.1b) - (3.1d), (3.1j), (3.1k)$$

$$(4.4b) \quad \bar{O}(\mathbf{z}, \mathbf{x}, \bar{\mathbf{Q}}) \geq 0,$$

$$(4.4c) \quad \bar{Q}_w \leq \bar{U}_w \quad w \in W,$$

where $\bar{O}(\mathbf{z}, \mathbf{x}, \bar{\mathbf{Q}}) \geq 0$ includes optimality cuts generated until that iteration. Since SROP-S is a generalization of SROP, the feasible solution of keeping all vehicles idle in their initial regions for all periods is also a feasible solution for the subproblem of SROP-S. Hence, we do not need to consider feasibility cuts in our algorithm. The

upper bound \bar{U}_w can be computed in a similar manner as in SROP model.

Given an optimal solution $(\hat{\mathbf{z}}, \hat{\mathbf{x}}, \hat{Q})$ for RMP, we solve the dual of the second-stage problem (3.5) as our subproblem for each scenario $w \in W$ by relating the dual variables $(\beta, \alpha, \gamma^1, \gamma^2, \lambda)$ with the constraints (3.5b)-(3.5f), respectively:

$$\begin{aligned}
(4.5a) \quad & \min \sum_{i \in I} \sum_{k \in K} \hat{x}_{ik} (\beta_{i0kw} - \beta_{iTkw}) + \sum_{i \in I} \sum_{a \in A^{two}(i)} \sum_{k \in K} u_{akw} \hat{z}_i \alpha_{akw} \\
& + \sum_{i \in I} \sum_{a \in A^{one}(i^+)} \sum_{k \in K} u_{akw} \hat{z}_i \gamma_{akw}^1 + \sum_{i \in I} \sum_{a \in A^{one}(i^-)} \sum_{k \in K} u_{akw} \hat{z}_i \gamma_{akw}^2 \\
& + \sum_{i \in I} \sum_{k \in K} C_i^k \hat{z}_i \left(\sum_{a \in A^{idle}(i)} \lambda_{akw} \right) \\
(4.5b) \quad & \text{s.t. } \beta_{itk^1w} - \beta_{jsk^1w} + \gamma_{ak^2w}^1 + \gamma_{ak^2w}^2 \geq r_{al} \quad \forall a = (n_{it}, n_{js}) \in A^{one}, \\
& \quad \quad \quad \forall k^1, k^2 \in K, l \in F^{k^1} \cap \hat{F}^{k^2}, \\
(4.5c) \quad & \beta_{itk^1w} - \beta_{isk^1w} + \alpha_{ak^2w} \geq r_{al} \quad \forall a = (n_{it}, n_{is}) \in A^{two}, \forall k^1, k^2 \in K, \\
& \quad \quad \quad l \in F^{k^1} \cap \hat{F}^{k^2}, \\
(4.5d) \quad & \beta_{itkw} - \beta_{j,t+\zeta_{ij},kw} \geq r_{al} \quad \forall a = (n_{it}, n_{j,t+\zeta_{ij}}) \in A^{rel}, \forall k \in K, \\
& \quad \quad \quad l \in F^k \cap \hat{F}^k, \\
(4.5e) \quad & \beta_{itkw} - \beta_{i,t+1,kw} + \lambda_{akw} \geq 0 \quad \forall a = (n_{it}, n_{i,t+1}) \in A^{idle}, \forall k \in K, \\
(4.5f) \quad & \gamma_{akw}^1, \gamma_{akw}^2 \geq 0 \quad \forall a \in A^{one}, \forall k \in K, \\
(4.5g) \quad & \alpha_{akw} \geq 0 \quad \forall a \in A^{two}, \forall k \in K, \\
(4.5h) \quad & \lambda_{akw} \geq 0 \quad \forall a \in A^{idle}, \forall k \in K.
\end{aligned}$$

Let $(\hat{\beta}, \hat{\alpha}, \hat{\gamma}^1, \hat{\gamma}^2, \hat{\lambda})$ be the optimal solution of the dual subproblem for scenario $w \in W$ given by (4.5). If its objective function value is overestimated in the current optimal solution $(\hat{\mathbf{z}}, \hat{\mathbf{x}}, \hat{Q})$ of RMP, i.e. if the optimal value of the subproblem for w is smaller than \hat{Q}_w , then we add the following optimality cut to RMP for scenario $w \in W$:

$$\begin{aligned}
(4.6) \quad & \sum_{i \in I} \sum_{k \in K} x_{ik} (\hat{\beta}_{i0kw} - \hat{\beta}_{iTkw}) + \sum_{i \in I} \sum_{a \in A^{two}(i)} \sum_{k \in K} u_{akw} z_i \hat{\alpha}_{akw} + \sum_{i \in I} \sum_{a \in A^{one}(i^+)} \sum_{k \in K} u_{akw} z_i \hat{\gamma}_{akw}^1 \\
& + \sum_{i \in I} \sum_{a \in A^{one}(i^-)} \sum_{k \in K} u_{akw} z_i \hat{\gamma}_{akw}^2 + \sum_{i \in I} \sum_{k \in K} C_i^k z_i \left(\sum_{a \in A^{idle}(i)} \hat{\lambda}_{akw} \right) - \bar{Q}_w \geq 0
\end{aligned}$$

4.3 Computational Enhancements

To enhance our solution algorithm, we implement the Bender’s decomposition algorithms by building a single search tree for the RMP. This is accomplished by employing the lazy constraint callback feature of the off-the-shelf solver. When a new incumbent solution is found in the branch-and-cut tree, the lazy constraint callback is invoked to solve the subproblems for each scenario for the current incumbent solution. If the optimal value of the subproblem for $w \in W$ is smaller than Q_w (or \bar{Q}_w), then an optimality cut is added to the RMP. If no cut is violated for any scenario, then the current solution is considered as a new incumbent solution. Following the literature, we use the multi-cut version of the algorithm where an optimality cut is added separately for each subproblem (Rahmaniani, Crainic, Gendreau & Rei, 2017).

The naive implementation of the Benders or L-Shaped algorithm mostly does not perform well because of the information lost in RMP due to the decision variables and constraints removed to the subproblems. Rahmaniani, Crainic, Gendreau & Rei (2018) summarizes, tests and compares different acceleration strategies that are proposed and used in the literature to overcome this drawback of the algorithm. In our computational experiments, we test the following acceleration strategies for our branch-and-cut algorithms for SROP and SROP-S:

- 1.1 **Initial solution:** As a warm-start strategy, we provide initial solutions for the problems by solving relatively small-scale problems with a randomly selected single scenario. In other words, we solve the MIP formulations of the problems by assuming that we have a single scenario, and we use the first stage solution obtained from these MIPs as an initial solution for our RMP.
- 1.2 **Initial Benders cuts:** Given the initial solution found in the previous item, we construct the corresponding Benders optimality cuts for each subproblem, and add these cuts to RMPs as initial cuts. These cuts enable the algorithm to have better (smaller) upper bounds in the earlier iterations.
- 1.3 **Improving the LP relaxation:** Lazy constraint callback and user cut callback are two important features of the off-the-shelf solvers that add cuts to the problems at different times. Lazy constraint callback is called when an integer candidate solution is found for the RMP while the user cut callback is called at any fractional solution. Since the Benders’ cuts are valid inequalities for RMPs we add them also at fractional solutions using the user cut callback

feature of the off-the-shelf solver. Following the literature, instead of adding user cuts at any node of the branch-and-cut tree, we add them only in the root node until the improvement in the relative optimality gap is very small. In this way, we improve the LP relaxations of RMPs at the root node of the branch-and-cut tree as much as possible.



5. COMPUTATIONAL STUDY

Our computational study demonstrates the value of the proposed models in terms of the service region, fleet design and operational planning decisions with the integration of substitution, along with the computational efficiency of the solution approach. In Chapter 5.2, from a modeling point of view, we highlight the impact of our modeling approach and the key problem parameters on optimal solutions from various perspectives with managerial insights. In Chapter 5.3, we investigate the effectiveness of our decomposition-based algorithms compared to the solution of MIPs by a commercial solver. Before proceeding to the results, we first describe the generation of problem instances used in our experiments in section 5.1.

5.1 Experimental Setup

We generate problem instances that represent the real case as much as possible by using the parameter settings explained in Lu et al. (2018) which is based on the data set of Zipcar in the Boston-Cambridge, Massachusetts area. Different than this study, we consider a car sharing company that aims to determine service regions and build its fleet from a mixture of vehicle types. Specifically, we focus on a company building a fleet from two different car types $K = \{E, G\}$ where E and G represent the electrical and internal combustion cars, respectively. We search for the prices and carbon emissions of different car models available in the market (see, (e.g. 8 Billion Trees, 2023; Toyota, 2023; US Environmental Protection Agency, 2023)), and accordingly set $c = [34K, 27K]$ and $e = [0, 0.75]$. We assume that the unitary carbon allowance is $H = 0.5$ unless otherwise is stated. Note that due to the carbon emission constraints (3.1d), $H = 0.5$ implies that for every two internal combustion cars purchased one electric car should be also purchased. We investigate the effect of the value of H in the last part of Chapter 5.2.

Table 5.1 Capacities and Fixed Costs for Each Service Region

Region (i)	1	2	3	4	5	6	7	8	9
Capacity for each car type(C_i^k)	6	9	7	6	8	9	8	9	6
Fixed cost (f_i)($\$K$)	345	367.5	352.5	345	360	367.5	360	367.5	345

We consider an area that is divided into 9 equal possible service regions, i.e. $|I| = 9$. We generate the parking space capacities of each region for each car type C_i^k randomly from $U[6,9]$ for $i \in I$ and $k \in K$. Similar to Lu et al. (2018), we set the annual unit parking space cost to $\$3500$ for each internal combustion car in each region. For the electric car parking spaces, due to the charging system operations, we set a higher parking space cost which is $\$4000$. We assume that the fixed rental cost for each service region is $\$300K$. To determine the total fixed cost f_i for opening service region $i \in I$ and locating the parking spaces, we add the total cost of the parking spaces to the rental cost of the region. For instance, for region 1, $f_1 = 300K + 6 \times (3500 + 4000) = 345K$. The parking space capacities and fixed costs for these regions can be seen in Table 5.1.

We consider a daily operational plan by dividing 24 hours into $|T| = 12$ periods. This can be done in different ways. For instance, one can simply divide 24 hours into 12 equal length periods. Alternatively, one can represent the rush-hours by using more periods of shorter length while merging several hours into one period during the off-hours. We use the first one by assuming that each period has the length of 2 hours. Since we make a daily plan for the trips, we set $D = 365$ as a normalization factor for combining the yearly fixed costs with the daily profits.

We determine the relocation times (in terms of periods) between the service regions based on the distance between them such that $\zeta_{ij} = 1$ if regions i and j are neighbors, and $\zeta_{ij} = 2$ otherwise. In addition to the fact that it takes more time to travel between two non-neighbor regions, we consider this setting to discourage frequent relocation actions between two regions that are far away from each other.

We consider the duration of the trips while generating the demand for the trips between regions. In other words, we assume that the probability of observing a demand for a long duration trip is very small compared to the shorter duration trips inspiring from the study of Ströhle et al. (2019) where it is empirically shown that majority of the trips are short in terms of duration and distance. More specifically, similar to the Lu et al. (2018)'s study, we assume that the demand for a one-way or round-trip with a duration less than or equal to $\frac{|T|}{3}$ is 0, 1, and 2 with the probabilities 0.8, 0.15, 0.05, respectively. If the duration of a trip is larger than $\frac{|T|}{3}$, since it is less likely to occur, the demand is 0 with probability 0.8, and 1

with probability 0.2. We use this demand distribution for generating all demand scenarios between all pairs of regions, and assume that the probability of realizing each scenario is the same, i.e. $\pi_w = \frac{1}{|W|}$.

Following the settings of Lu et al. (2018), we set the revenue for one-way and round-trips as $r_k^{one} = \$12$ and $r_k^{two} = \$7.75$ per hour for each car type k . We also assume that the relocation cost is $c^{rel} = \$8$ per hour. In the model SROP-S, we set the penalty cost for substitution to $p = 2$ unless otherwise is stated. For illustrative purposes, in the subsequent section, we consider this problem instance with $|W| = 100$ scenarios and analyse the results in detail from different perspectives.

5.2 Model Insights

Service Region and Fleet Sizing Decisions. We first investigate the profitability of the company under different budget constraints and with and without substitution. The annual net profit, revenue from different trip types, the fixed cost of opening service regions and the cost of relocating cars at the optimal solutions of the models SROP and SROP-S under different budget levels are given in Table 5.2. Note that the demand that can be satisfied by the company depends on the service region opening decisions. In other words, the demand of a potential service region will be lost if a service region is not opened there. Hence, to increase the profit the company should cover more demand by opening more service regions. On the other hand, opening a service region is not sufficient to cover the demand by itself, since there should be sufficiently many vehicles located to that region to satisfy that demand. Therefore, both the total fixed cost of opening service regions and the net profit increase with the budget of fleet sizing, and this can be seen in Table 5.2 for both models. When the budget is multiplied by 2 ($B = 2M$ vs $B = 4M$), the net profit increases approximately by a multiple of 5 in both models. In the fourth column, we present the payback periods for the initial investment given by the ratio of the budget to the annual net profit. Payback period represents the number of years to cover the initial cost of the investment B (by ignoring the other economical factors such as the maintenance costs, annual interest rates, etc.). Note that it takes almost 12 years to cover the initial investment of 2 millions while the duration reduces to 4 years when the initial investment is twice in the model SROP. On the other hand, increasing the budget does not affect the payback period after a certain budget level as each region has a vehicle capacity. Moreover, this payback period

reduces in SROP-S, which will be discussed in the next part. Hence, an important observation from Table 5.2 is that, if it is possible, the company should allocate more budget for building the fleet to increase the annual net profit, and the payback period will be shorter for larger initial budget levels.

Table 5.2 Revenue and Cost Values of SROP and SROP-S Under Different Budget Levels

Model	Budget (\$M)	Net Profit(\$K)	Payback Period (yr)	Revenue(\$K)			Cost(\$K)		Solution Time (s)
				Total	One-Way	Round-Trip	Fixed	Relocation	
SROP	2	172.41	11.60	1672.06	405.15	1266.91	1447.50	52.15	4600
	2.5	318.61	7.85	2200.87	648.68	1552.19	1807.50	74.78	3989
	3	494.63	6.07	2744.33	949.23	1795.10	2160.00	89.70	2156
	3.5	728.87	4.80	3675.00	1627.61	2047.39	2850.00	96.13	862
	4	934.31	4.28	4253.78	1938.98	2314.79	3210.00	109.50	564
SROP-S	2	231.40	8.64	1715.72	411.71	1304.01	1447.50	36.82	14761
	2.5	411.17	6.08	2565.25	993.59	1571.66	2115.00	39.10	19078
	3	612.70	4.90	3164.92	1315.66	1849.26	2505.00	47.22	6379
	3.5	862.34	4.06	3771.12	1701.05	2070.07	2850.00	58.78	2403
	4	1081.53	3.70	4358.28	2018.46	2339.83	3210.00	66.78	601

From Table 5.2, we see that the revenue from round-trip arcs is higher than the one-way trips in all settings. But note that the difference decreases with the budget as more vehicles are purchased and more service regions are opened. For instance, in SROP, while the return from round-trips is almost three times larger than the revenue from one-way trips when $B = 2M$, they are very close when $B = 4M$. If the company has lower budget values, less service regions are opened. Thus, the proportion of the demand that can be satisfied for one-way rentals decreases since both starting and ending service regions must be opened to satisfy one-way rental demand. Hence, the returns from different trip types depend on the fleet sizing and service region decisions. Moreover, the relocation costs are very small compared to the other cost and return components, but they also increase with the budget due to the same reasons.

The last column of Table 5.2 represents the solution time of the models with given settings in seconds. We use Benders decomposition with enhancements for solving these models (details of solution algorithms are explained in Section 5.3). Note that it is harder to solve the problem when the budget is low, and as higher budget values relax the problem the solution time decreases dramatically.

Value of Substitution. We next discuss the effect of substitution by comparing the detailed analysis of the optimal values of the models SROP and SROP-S under different budget B levels. Note that, SROP-S is a generalization of SROP since any feasible solution for the latter is also feasible for the first. Hence, the optimal value

of SROP-S should be greater than or equal to the optimal value of SROP, and the difference between the optimal values of these models can be regarded as the value of substitution.

From Table 5.2, we observe that the total net profit increases with substitution. For instance, the net profit increases by 34.21% and 29.05% due to substitution when the budget is $B = 2M$ and $B = 2.5M$, respectively. Note that the total service region opening costs are the same for SROP and SROP-S when the budget is $B \in \{2M, 3.5M, 4M\}$, and it is larger for SROP-S in the other budget levels.

In Table 5.2, we see that the main difference in the revenue is due to the one-way trips covered by these two models especially when the budget is at a medium level. For instance, the revenue obtained from one-way trips increases by 53% and 39% due to substitution when the budget is $B = 2.5M$ and $B = 3M$, respectively.

Comparing the results for $B = 3M$ and $B = 3.5$ in Table 5.2 reveals that the value of substitution decreases with the budget. Note that if there exists no budget, carbon emission and capacity constraints, the ideal solution would be to satisfy all demand by its own car type. Hence, when the budget for fleet sizing is larger, since more cars will be available in the service regions, satisfying the demand by the actual car type demanded will occur more, and the value of substitution will decrease. But, as it can be observed from Table 5.2, though the effect of substitution is smaller compared to $B = 3M$, the total net profit is increased by 18.31% due to substitution when the budget is $B = 3.5M$. Note that the total service region opening costs are the same for the models in these budget levels.

We also observe an interesting result from Table 5.2 where the total relocation cost of SROP-S is lower than that of SROP under all budget levels. We note that substitution between different car types works as a relocation in SROP-S. In other words, instead of using a worker to relocate a vehicle between two regions (and observing a cost), using that vehicle for satisfying the demand for the other vehicle type (and getting a return) helps the company to balance the cars at the service regions, and this reduces the relocation costs and increases the return.

Table 5.3 Value of Substitution and Average Flows for $B = \$3M$

Penalty (p)	Commodity	Average Flow				Subs. Rate(%)	Objective Increase(%)	Achieved Increase(%)
		One-way	Round-Trip	Relocation	Idle			
$\rightarrow \infty$ ($E : 48, G : 48$)	E-E	66.74	70.96	15.55	80.90	-	-	-
	E-G	-	-	-	-	-	-	-
	G-G	67.12	70.78	15.17	82.46	-	-	-
	G-E	-	-	-	-	-	-	-
4 ($E : 46, G : 53$)	E-E	81.52	63.28	7.61	48.94	-	-	-
	E-G	7.97	4.12	-	-	5.57	19.00	64.85
	G-G	86.21	69.07	8.97	59.99	-	-	-
	G-E	10.64	7.91	-	-	8.60	-	-
2 ($E : 46, G : 53$)	E-E	80.25	62.90	7.46	47.97	-	-	-
	E-G	9.12	5.18	-	-	6.59	23.88	81.50
	G-G	84.55	68.17	8.71	59.07	-	-	-
	G-E	11.77	8.97	-	-	9.61	-	-
$\rightarrow 0$ ($E : 46, G : 53$)	E-E	79.77	61.97	7.18	48.83	-	-	-
	E-G	10.02	5.86	-	-	7.31	29.30	100
	G-G	84.59	66.94	8.90	59.66	-	-	-
	G-E	13.36	9.68	-	-	10.69	-	-

In Table 5.3, we present the average number of one-way and round-trips, relocation actions, and idle vehicles waiting in the service regions B under different substitution penalty prices p when the budget is $B = 3M$. Note that $p \rightarrow \infty$ represents SROP since SROP-S reduces to SROP when $p \rightarrow \infty$ as substitution will not be used in this case. For the other extreme case, where substitution is allowed and not penalized, $p \rightarrow 0$, we consider a very small but positive p value ($p = 0.001$) to observe meaningful results for different commodities. Considering two car types, we have four commodities in SROP-S, and the commodity $a - b$ represents the case where the demand for car type b is satisfied by car type a , for $a, b \in \{E, G\}$. Note that the company gains money over the flows on one-way and round-trip arcs, loses money due to the flows on relocation arcs, and has no gain or cost on the flows on idle arcs (though they might be also perceived as loss on potential profit).

From Table 5.3, we observe that the average number of idle vehicles and the relocation actions decrease dramatically with substitution. Note that the average number of idle vehicles is around 80 for both car types in SROP while it is less than 50 and 60 for electric and internal combustion cars, respectively, in SROP-S. Similarly, the average number of relocation movements are around 15 and 8 in SROP and SROP-S, respectively. Hence, substitution provides the company a flexibility for eliminating the non-value adding operations (relocation and being idle in our case) and increasing the net profit. Moreover, as it can be seen in Table 5.3, one-way trips are preferred more when substitution is allowed since one-way trips also serve as relocation and their unit profit is larger. Additionally, average number of one-way trips increases while the average number of round-trip trips decreases in SROP-S

compared to SROP.

When we compare the results of SROP-S for different penalty $p \in \{0, 2, 4\}$ values, we observe that though the average flows of substitution commodities ($E - G$ and $G - E$) decrease, the average number of trips do not change so much for each commodity. Hence, we can say that the solution of SROP-S is robust with respect to the different values of p except the case $p \rightarrow \infty$ which represents SROP.

In the last three columns of Table 5.3, we present the percentage of substitution, increase in the net profit and the relative increase in the net profit for different p values. As it is expected, the substitution rates and the net profit increases when p is decreasing. Moreover, the substitution rates are larger for ICVs under all settings. Since ICV is cheaper, when substitution is allowed, the company buys more ICV (the numbers of electric and internal combustion cars purchased are given under the column Penalty in parenthesis) and uses them for satisfying the demand for electric cars. To calculate Achieved Increase rates for each penalty parameter, we take the ratio of the percentage increase in the net profit under that penalty parameter to the increase in the net profit when $p \rightarrow 0$. For instance, though the net profit is increased by 19% when $p = 4$ compared to $p \rightarrow \infty$, this increase actually corresponds to the 64.85% of the maximum possible increase in the net profit, showing that a significant amount of increase is achieved with the substitutions. Appendix A provides additional results on the value of substitution when the car sharing company has higher budget.


Demand Satisfaction Levels. We next discuss the demand satisfaction rates for these two models under two different budget levels. For different penalty $p \in \{0, 2, 4\}$ values, demand satisfaction rates are very similar. Thus, in the following tables and figures, penalty value is taken as 2. Notice that the demand that can be covered strongly depends on the service region opening decisions. Hence, in Table 5.4 we report the demand satisfaction rates with respect to two different values. We first present the number of service regions opened under the column SR. In columns 4 and 5, we give the percentage of the satisfied demand for electric (EV) and ICVs with respect to the total demand of the service regions opened. In columns 6 and 7, we report these percentages with respect to the total demand of the whole system. In the remaining columns, the percentage of the satisfied demand for each region is given. Positions of these regions, i.e. 1-a, 2-a, etc., with respect to each other can be seen in Figures 5.1 and 5.2 where the demand satisfaction rates for the regions are illustrated visually with different colors.

From Table 5.4, we see that SROP has higher demand satisfaction levels for both car types compared to SROP-S when $B = 3M$ and only the demand of opened

Table 5.4 Demand Satisfaction Rates for SROP and SROP-S Under Different Budget Parameters

Budget	Model	SR(%)			Total(%)		Service Region Based Demand Satisfaction(%)								
		SR	EV	ICV	EV	ICV	1-a	2-a	3-a	1-b	2-b	3-b	1-c	2-c	3-c
3M	SROP	6	81.57	81.37	42.53	42.25	82.94	81.24	83.02	0.00	0.00	83.43	86.23	86.5	0.00
	SROP-S	7	76.28	77.25	50.57	51.13	79.98	78.61	81.59	0.00	0.00	78.93	83.85	81.48	79.26
3.5M	SROP	8	72.19	74.24	59.35	60.76	75.63	74.96	77.03	73.81	0.00	76.20	78.53	77.98	75.75
	SROP-S	8	76.01	77.08	62.50	63.10	79.32	78.57	81.24	77.48	0.00	80.37	82.3	82.35	79.80


Figure 5.1 Visual Comparison of Demand Satisfaction Rates of SROP (left) and SROP-S (right) for $B = 3M$

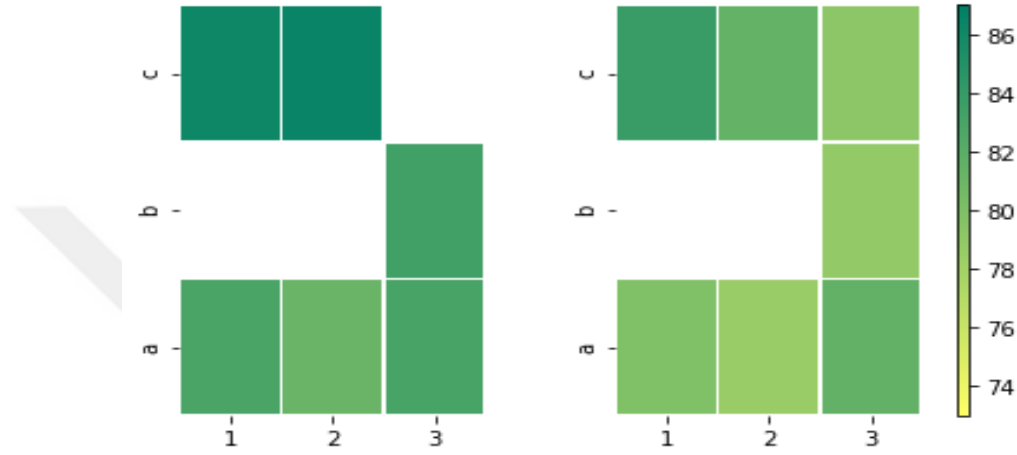

service regions are considered. On the other hand, the demand satisfaction rates are higher for SROP-S with respect to the total demand of the system under the same budget level. Note that the number of service regions opened are not the same for SROP and SROP-S when $B = 3M$. Hence, when $B = 3M$, SROP-S opens one more service region and this reduces the demand satisfaction rates of the other service regions opened (see the last 9 columns). This shows the trade-off between opening a new service region and satisfying more demand by serving less regions under a limited budget for fleet sizing. SROP-S allocates some of the purchased cars to the additional region it opens, region 3-c, and due to this fact, the demand satisfaction rates in the other opened regions decrease compared to SROP. But note that this decision increases the total net profit of the company by 23.87% (see Table 5.2). When $B = 3.5M$, since the number of opened regions is the same for both models, the demand satisfaction levels are larger for SROP-S in all opened regions. Figures 5.1 and 5.2 illustrate these observations. In Figure 5.1, since SROP opens less service regions, demand satisfaction levels are higher (darker) in all *opened* regions. In Figure 5.2, since both models open the same regions, the demand satisfaction rates are larger (darker) in SROP-S in all regions. Additionally, note that the regions that are decided to be served by SROP are also covered by SROP-S. Hence, the service region opening decisions are not affected so much by the substitution decision though additional ones might be opened in SROP-S due to the flexibility

it provides to the company.

Figure 5.2 Visual Comparison of Demand Satisfaction Rates of SROP (left) and SROP-S (right) for $B = 3.5M$

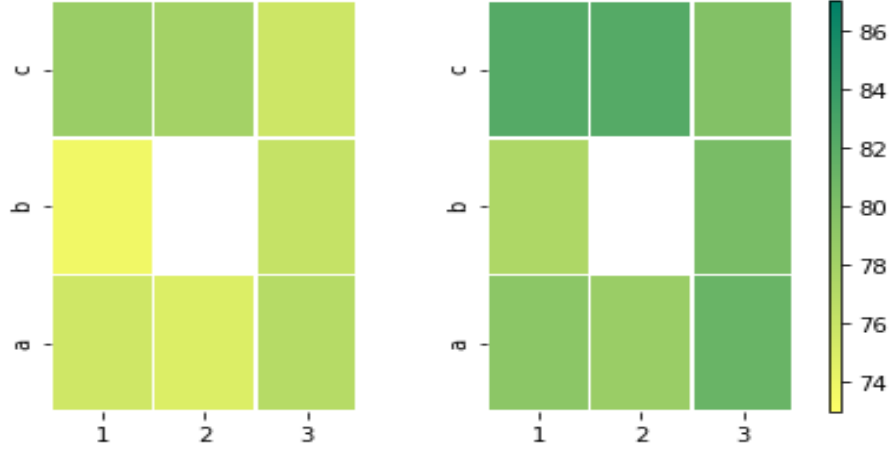

Carbon emission. We report the results of SROP and SROP-S under two different budget levels $B \in \{3M, 3.5M\}$ and two different carbon emission allowances $H \in \{0.3, 0.5\}$ in Table 5.5. As the problems become more restricted for small H values, the net profit increases with H . Note that the value of substitution becomes more prominent when the problem is more restricted, i.e. $H = 0.3$ and $B = 3M$ with more than 58% increase in net profit.

The unitary carbon allowance H directly affects the percentage of the car types in the fleet and this can be observed from Table 5.5. Although the fleet sizes are very close under different H levels, the ratio of the number of electric and internal combustion cars changes significantly. As the internal combustion cars are cheaper but have larger emissions, the percentage of internal combustion cars in the fleet increases with H . This also affects the number of service regions opened. Appendix A provides visual comparisons of demand satisfaction rates of SROP and SROP-S models under different budget levels. Notice that more service regions are opened by both models when $H = 0.3$ compared to $H = 0.5$. For smaller H values, since more EVs are purchased and there are separate parking space capacities for electric and internal combustion cars, the models prefer to open more service regions to use these electric cars for satisfying more demand.

Table 5.5 The Effect of Carbon Emission Allowance on Planning Decisions

B	H	Model	Obj.(\$K)	Obj. Inc.for Subs.(%)	Obj. Inc.for H(%)	SR	# of Cars (G/E)	Total # of Cars
3M	0.3	SROP	269.5	-	-	8	38/58	96
		SROP-S	427.3	58.52	-	8	38/58	96
	0.5	SROP	494.6	-	83.52	6	48/48	96
		SROP-S	612.7	23.88	43.38	7	53/46	99
3.5M	0.3	SROP	461.5	-	-	9	44/68	112
		SROP-S	645.0	39.76	-	9	44/68	112
	0.5	SROP	728.9	-	57.94	8	59/56	115
		SROP-S	862.4	18.32	33.70	8	59/56	115

5.3 Computational Performances

In the second part of our computational study, we evaluate the performance of our decomposition based solution algorithm for solving large problem instances. We consider problem instances with $|W| \in \{50, 100, 200\}$ scenarios under two different budget levels $B \in \{3M, 3.5M\}$, and generate three random problem instances for each setting. We set the time limit to four hours. For both of the models SROP and SROP-S, we compare the Deterministic Equivalent Formulations (DEF) of the models SROP and SROP-S given in Chapter 3, and the Branch-and-Cut algorithms without (B&C) and with the enhancements (B&C+) presented in Chapter 4. In our preliminary experiments, we test all enhancements stated in Chapter 4.3, and observe that contribution of the last enhancement is limited compared to the first two. Hence, we omit enhancement 1.3, and use 1.1 and 1.2 in our B&C+ algorithm. All tests are performed on a personal computer running Microsoft Windows 10 64 bit operating system at Intel i5-10210U 1.60 GHz processor with 16 GB RAM at 8 threads. All formulations and algorithms are implemented and solved in Gurobi 9.5.2 and Phyton interface with the default settings.

We present the results in Table 5.6 where ST and Gap represent the solution time (in seconds) and the optimality gap, respectively. If the solver terminates due to the time limit, it is stated as TL under the column ST, and the optimality gap reported by the solver at the end of the time limit is presented under the column Gap. If no feasible solution could be found by the solver within the time limit, we note it as N/A under the column Gap. For each instance, we emphasize the best result in terms of the solution time and the optimality gap in bold.

As it can be seen from Table 5.6, the single stage formulations DEF can be solved to

Table 5.6 Computational Comparison of Model Types for Different Parameters and Problem Sizes

W	B (\$)	Ins #	SROP						SROP-S					
			DEF		B&C		B&C+		DEF		B&C		B&C+	
			ST	Gap(%)	ST	Gap(%)	ST	Gap(%)	ST	Gap(%)	ST	Gap(%)	ST	Gap(%)
50	3M	1	1085	0.00	1326	0.00	1282	0.00	5681	0.00	3138	0.00	2961	0.00
		2	1513	0.00	1478	0.00	1537	0.00	6208	0.00	3768	0.00	2457	0.00
		3	719	0.00	1359	0.00	1258	0.00	5314	0.00	3974	0.00	3483	0.00
	3.5M	1	690	0.00	653	0.00	510	0.00	2731	0.00	1442	0.00	593	0.00
		2	692	0.00	551	0.00	317	0.00	3191	0.00	1261	0.00	770	0.00
		3	640	0.00	485	0.00	427	0.00	3525	0.00	1291	0.00	1325	0.00
100	3M	1	4093	0.00	2555	0.00	2156	0.00	TL	100.00	6379	0.00	6076	0.00
		2	3823	0.00	2817	0.00	2886	0.00	TL	100.00	6451	0.00	6167	0.00
		3	3080	0.00	2449	0.00	2281	0.00	TL	39.60	7053	0.00	6532	0.00
	3.5M	1	2486	0.00	1144	0.00	862	0.00	10997	0.01	2403	0.00	1310	0.00
		2	2368	0.00	1318	0.00	1336	0.00	12203	0.01	2974	0.00	2440	0.00
		3	2417	0.00	1039	0.00	988	0.00	TL	0.00	3298	0.00	2558	0.00
200	3M	1	TL	35.31	4444	0.00	3507	0.00	TL	N/A	TL	0.02	11175	0.00
		2	TL	100.00	6859	0.00	5236	0.00	TL	100.00	TL	3.26	10120	0.00
		3	14110	0.00	5085	0.00	6185	0.00	TL	100.00	TL	17.43	TL	0.69
	3.5M	1	11192	0.00	3115	0.00	1403	0.00	TL	73.89	5476	0.00	3810	0.00
		2	12404	0.00	2171	0.00	1470	0.00	TL	N/A	4963	0.00	2980	0.00
		3	10332	0.00	1838	0.00	1628	0.00	TL	80.06	6140	0.00	6317	0.00

optimality within the time limit only for small problem instances. The gaps reported for DEF demonstrate that it is hard to obtain a good quality solution for large problem instances using DEF. On the other hand, the decomposition based algorithms B&C and B&C+ perform better than DEF almost in all problem instances. Both algorithms solve SROP instances within the time limit, but the solution times are mostly better for B&C+. The size of SROP-S is larger than SROP for a given instance since the number of commodities in these models are four and two, respectively. Therefore, it is harder to solve SROP-S, in general, and this can be observed from Table 5.6. Again, the best algorithm for solving SROP-S is B&C+, which means that the enhancements presented in Chapter 4 improves the performance of the algorithm B&C. Moreover, the problems become relatively easier to solve for larger B levels.

6. CONCLUSION

In this thesis, we study the service region design and operational planning problem for a car sharing company that constructs a mixed fleet of gasoline **ICVs** and EVs under the demand uncertainty for one-way and round-trip rental requests and the carbon emission constraints. We introduce substitution to the problem by allowing satisfying the demand for a specific car type using the other type. We develop a two-stage stochastic mixed-integer programming model for the problem, and propose an exact decomposition based algorithm. Our computational experiments reveal the success of our algorithm in solving larger problem instances compared to the off-the-shelf solver. We discuss the impact of different problem parameters on the decisions of the problem through a case study based on real data sets. The results of the case study indicate the value of substitution for both increasing the profit of the company and the demand satisfaction level of the customers. Since substitution gives a flexibility to the car sharing company, we observe that less rebalancing operations are required when substitution is allowed. Besides, the results show the important effect of the fleet sizing budget and the carbon emission allowance on the service region opening and the fleet allocation decisions.

As future research directions, the model considered in this thesis can be extended from several directions. First, we assume that the customers accept substitution independent from the car type that is substituted and the price offered. In a future research, substitution should be studied in more detail by including the customer behaviour and also the pricing strategy of the company for substitution. Second, in this study we approximate the demand for the next T periods using two-stage stochastic programming, and a more appropriate approach might be to formulate the problem as a multi-stage stochastic program which is more challenging to solve.

BIBLIOGRAPHY

- 8 Billion Trees (2023). Cars with lowest co2 emissions: Full list by car type, size, energy source. <https://8billiontrees.com/carbon-offsets-credits/cars-with-lowest-co2-emissions/>.
- Abouee-Mehrizi, H., Baron, O., Berman, O., & Chen, D. (2021). Adoption of electric vehicles in car sharing market. *Production and Operations Management*, 30(1), 190–209.
- Absi, N., Dautère-Pérès, S., Kedad-Sidhoum, S., Penz, B., & Rapine, C. (2013). Lot sizing with carbon emission constraints. *European Journal of Operational Research*, 227(1), 55–61.
- Absi, N., Dautère-Pérès, S., Kedad-Sidhoum, S., Penz, B., & Rapine, C. (2016). The single-item green lot-sizing problem with fixed carbon emissions. *European Journal of Operational Research*, 248(3), 849–855.
- Amatuni, L., Ottelin, J., Steubing, B., & Mogollón, J. M. (2020). Does car sharing reduce greenhouse gas emissions? assessing the modal shift and lifetime shift rebound effects from a life cycle perspective. *Journal of Cleaner Production*, 266, 121869.
- Barth, M. & Todd, M. (1999). Simulation model performance analysis of a multiple station shared vehicle system. *Transportation Research Part C: Emerging Technologies*, 7(4), 237–259.
- Benders, J. (1962). Partitioning procedures for solving mixed-variables programming problems. *Numerische mathematik*, 4(1), 238–252.
- Boldrini, C., Bruno, R., & Conti, M. (2016). Characterising demand and usage patterns in a large station-based car sharing system. In *2016 IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS)*, (pp. 572–577).
- Boyacı, B., Zografos, K. G., & Geroliminis, N. (2015). An optimization framework for the development of efficient one-way car-sharing systems. *European Journal of Operational Research*, 240(3), 718–733.
- Brandstätter, G., Leitner, M., & Ljubić, I. (2020). Location of charging stations in electric car sharing systems. *Transportation Science*, 54(5), 1408–1438.
- Brandstätter, G., Kahr, M., & Leitner, M. (2017). Determining optimal locations for charging stations of electric car-sharing systems under stochastic demand. *Transportation Research Part B: Methodological*, 104, 17–35.
- Çalık, H. & Fortz, B. (2019). A benders decomposition method for locating stations in a one-way electric car sharing system under demand uncertainty. *Transportation Research Part B: Methodological*, 125, 121–150.
- Chang, J., Yu, M., Shen, S., & Xu, M. (2017). Location design and relocation of a mixed car-sharing fleet with a co2 emission constraint. *Service Science*, 9(3), 205–218.
- Dawande, M., Gavirneni, S., Mu, Y., Sethi, S., & Sriskandarajah, C. (2010). On the interaction between demand substitution and production changeovers. *Manufacturing & Service Operations Management*, 12(4), 682–691.
- de Almeida Correia, G. H. & Antunes, A. P. (2012). Optimization approach to depot location and trip selection in one-way carsharing systems. *Transportation*

- Research Part E: Logistics and Transportation Review*, 48(1), 233–247.
- Feng, Q., Li, C., Lu, M., & Shanthikumar, J. G. (2022). Dynamic substitution for selling multiple products under supply and demand uncertainties. *Production and Operations Management*, 31(4), 1645–1662.
- Ferrero, F., Perboli, G., Rosano, M., & Vesco, A. (2018). Car-sharing services: An annotated review. *Sustainable Cities and Society*, 37, 501–518.
- Gambella, C., Malaguti, E., Masini, F., & Vigo, D. (2018). Optimizing relocation operations in electric car-sharing. *Omega*, 81, 234–245.
- Greenhouse Gas Protocol (2023). <https://ghgprotocol.org>.
- He, L., Ma, G., Qi, W., & Wang, X. (2021). Charging an electric vehicle-sharing fleet. *Manufacturing & Service Operations Management*, 23(2), 471–487.
- He, L., Mak, H.-Y., Rong, Y., & Shen, Z.-J. M. (2017). Service region design for urban electric vehicle sharing systems. *Manufacturing & Service Operations Management*, 19(2), 309–327.
- Illgen, S. & Höck, M. (2019). Literature review of the vehicle relocation problem in one-way car sharing networks. *Transportation Research Part B: Methodological*, 120, 193–204.
- Jorge, D., Correia, G. H., & Barnhart, C. (2014). Comparing optimal relocation operations with simulated relocation policies in one-way carsharing systems. *IEEE Transactions on Intelligent Transportation Systems*, 15(4), 1667–1675.
- Jung, J. & Koo, Y. (2018). Analyzing the effects of car sharing services on the reduction of greenhouse gas (ghg) emissions. *Sustainability*, 10(2), 539.
- Kaspi, M., Raviv, T., & Tzur, M. (2014). Parking reservation policies in one-way vehicle sharing systems. *Transportation Research Part B: Methodological*, 62, 35–50.
- Laporte, G., Nickel, S., & Saldanha da Gama, F. (Eds.). (2015). *Location Science*. Springer.
- Liu, W., Ma, W., Hu, Y., Jin, M., Li, K., Chang, X., & Yu, X. (2019). Production planning for stochastic manufacturing/remanufacturing system with demand substitution using a hybrid ant colony system algorithm. *Journal of Cleaner Production*, 213, 999–1010.
- Lu, M., Chen, Z., & Shen, S. (2018). Optimizing the profitability and quality of service in carshare systems under demand uncertainty. *Manufacturing & Service Operations Management*, 20(2), 162–180.
- Luna, T. F., Uriona-Maldonado, M., Silva, M. E., & Vaz, C. R. (2020). The influence of e-carsharing schemes on electric vehicle adoption and carbon emissions: An emerging economy study. *Transportation Research Part D: Transport and Environment*, 79, 102226.
- Nair, R. & Miller-Hooks, E. (2014). Equilibrium network design of shared-vehicle systems. *European Journal of Operational Research*, 235(1), 47–61.
- Nansubuga, B. & Kowalkowski, C. (2021). Carsharing: a systematic literature review and research agenda. *Journal of Service Management*, 32(6), 55–91.
- Pfrommer, J., Warrington, J., Schildbach, G., & Morari, M. (2014). Dynamic vehicle redistribution and online price incentives in shared mobility systems. *IEEE Transactions on Intelligent Transportation Systems*, 15(4), 1567–1578.
- Rahmaniani, R., Crainic, T. G., Gendreau, M., & Rei, W. (2017). The benders decomposition algorithm: A literature review. *European Journal of Operational Research*, 259(3), 801–817.

- Rahmaniani, R., Crainic, T. G., Gendreau, M., & Rei, W. (2018). Accelerating the benders decomposition method: Application to stochastic network design problems. *SIAM Journal on Optimization*, 28(1), 875–903.
- Rao, U. S., Swaminathan, J. M., & Zhang, J. (2004). Multi-product inventory planning with downward substitution, stochastic demand and setup costs. *IIE Transactions*, 36(1), 59–71.
- Shumsky, R. A. & Zhang, F. (2009). Dynamic capacity management with substitution. *Operations Research*, 57(3), 671–684.
- Smet, P. (2021). Vehicle substitution in heterogeneous round-trip carsharing systems. *Computers & Industrial Engineering*, 162, 107703.
- Ströhle, P., Flath, C. M., & Gärttner, J. (2019). Leveraging customer flexibility for car-sharing fleet optimization. *Transportation Science*, 53(1), 42–61.
- Toyota (2023). <https://www.toyota.com/>.
- U.S. Congressional Budget Office (2022). Emissions of carbon dioxide in the transportation sector. <https://www.cbo.gov/publication/58566>.
- U.S. Department of Transportation (2016). Shared mobility: Current practices and guiding principles. <https://ops.fhwa.dot.gov/publications/fhwahop16022/fhwahop16022.pdf>.
- US Environmental Protection Agency (2023). <https://www.epa.gov/>.
- U.S. Vehicle Technologies Office (2023). Top 10 new electric vehicle registrations in 2022 were models with long ranges. <https://www.energy.gov/eere/vehicles/articles/fotw-1286-april-17-2023-top-10-new-electric-vehicle-registrations-2022-were>.
- Van Slyke, R. M. & Wets, R. (1969). L-shaped linear programs with applications to optimal control and stochastic programming. *SIAM Journal on Applied Mathematics*, 17(4), 638–663.
- Xu, H., Yao, D., & Zheng, S. (2011). Optimal control of replenishment and substitution in an inventory system with nonstationary batch demand. *Production and Operations Management*, 20.
- Zhang, Y., Lu, M., & Shen, S. (2021). On the values of vehicle-to-grid electricity selling in electric vehicle sharing. *Manufacturing & Service Operations Management*, 23(2), 488–507.

APPENDIX A

Value of Substitution under Higher Budget

Table A.1 provides the value of substitution when budget $B = \$3.5M$. Compared to Table 5.3, number of cars purchased increases due to the increase in budget from $B = \$3M$ to $B = \$3.5M$. Thus, there is less need for substitution, resulting in slightly less increases in net profit values. Similar to the previous results, majority of maximum potential return is achieved under various penalty parameter values. Additionally, car flows are robust to the changes in penalty parameters.

Table A.1 Value of Substitution and Average Flows for $B = \$3.5M$

Penalty	Commodity	Average Flow				Subs. Rate(%)	Objective Increase(%)	Achieved Return(%)
		One-way	Round-Trip	Relocation	Idle			
$\rightarrow \infty$ ($E : 56, G : 59$)	E-E	114.69	77.53	15.26	61.70	-	-	-
	E-G	-	-	-	-	-	-	-
	G-G	117.39	81.04	17.66	69.28	-	-	-
	G-E	-	-	-	-	-	-	-
4 ($E : 56, G : 59$)	E-E	110.14	73.14	9.52	55.35	-	-	-
	E-G	10.31	5.98	-	-	6.07	14.46	63.89
	G-G	114.09	75.68	10.90	59.59	-	-	-
	G-E	12.51	7.06	-	-	7.17	-	-
2 ($E : 56, G : 59$)	E-E	108.24	72.35	9.50	54.02	-	-	-
	E-R	12.05	6.92	-	-	7.08	18.32	80.93
	G-G	112.21	74.98	10.63	59.22	-	-	-
	G-E	13.82	8.17	-	-	8.21	-	-
$\rightarrow 0$ ($E : 56, G : 59$)	E-E	108.01	71.08	9.50	55.38	-	-	-
	E-G	13.35	7.70	-	-	7.85	22.62	100
	G-G	111.77	73.73	10.54	59.12	-	-	-
	G-E	15.46	9.23	-	-	9.23	-	-

Demand Satisfaction Levels under Lower Carbon Parameter Value

Figures A.1 and A.2 provide which regions are open and how demand is satisfied under different budget levels when $H = 0.3$. Since the problem becomes more restrictive due to lower carbon parameter value of $H = 0.3$, demand satisfaction rates are smaller compared to the cases when $H = 0.5$. Different than Figures 5.1 and 5.2, which have different open service regions under SROP and SROP-S models, when the model becomes more restrictive in terms of carbon allowance, then both models open the same set of service regions in both Figures A.1 and A.2. On the other hand, demand satisfaction percentages are higher under the SROP-S model in all open service regions by utilizing substitution in satisfying customer demand.

Figure A.1 Visual Comparison of Demand Satisfaction for $H=0.3$ and $B=3M$

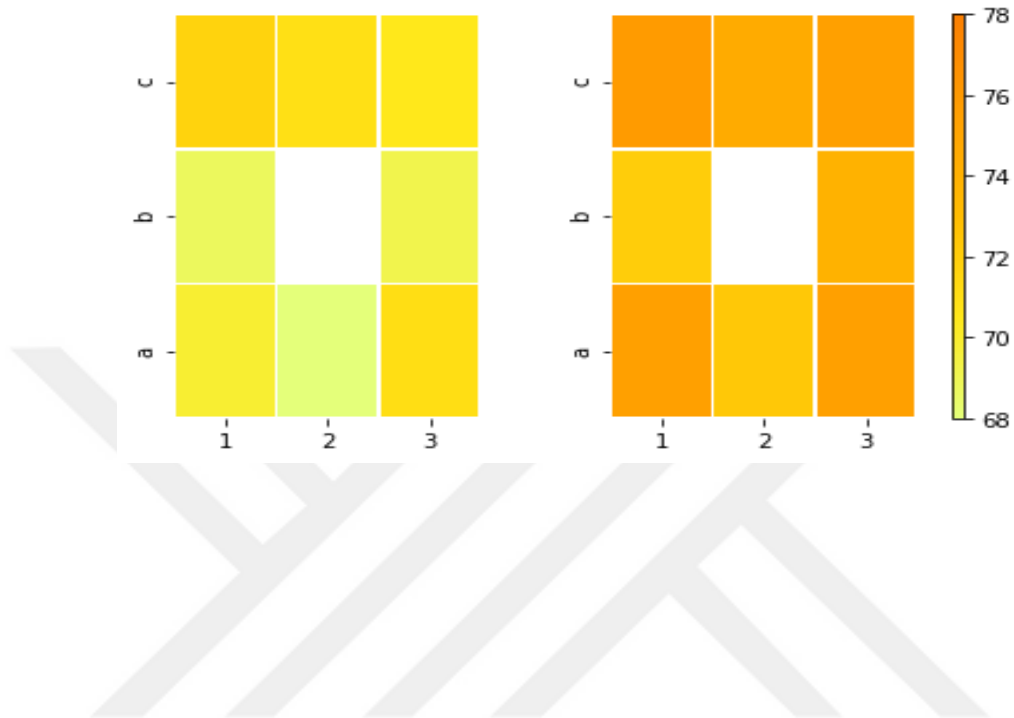


Figure A.2 Visual Comparison of Demand Satisfaction for $H=0.3$ and $B=3.5M$

